



Make Your Own LOGO Mat

Pick the Colors

Measure the Size

Then go ahead >>

Instruction personnalisée

& gt; Longue Durable Jet

d'encre Impression Logo sur la Nylon Fibre avec Antidérapant Naturel Caoutchouc Support.

& gt; Non Limitation sur Les dessins, Couleurs & Taille.

& gt; Parfait Façon à Promouvoir Votre Compagnie Image.

& gt; UNE Sol Tapis avec un Attraper les yeux Conception cette pouvez Améliorer l'image de marque et Commercialisation Efforts.

& gt; Tous les deux pour Intérieur & De plein air Emplacements

Vous avez 4 choix concernant les piles en nylon:

& gt; Article# DK-2450: support en caoutchouc 3mm / 450gsm + 2mm / 2000gsm
Compétitif Prix, Inférieur Pile La taille, Meilleur Choix pour Compliqué Des dessins



& gt; Article# DK-2000: 4mm /600gsm Nylon + 2support en caoutchouc mm /

2000gsm

Plus Populaire Articles, Inférieur Torsion Pile, Meilleur Vendre pour NOUS Marché



& gt; Article# DK-2200: 5mm /700gsm Nylon + 2support en caoutchouc mm / 2000gsm

Plus haute Torsion Pile, Plus lourd Devoir Article pour Choix




& gt; Article# DK-2300: 7mm / 950gsm Nylon + 2support en caoutchouc mm / 2000gsm


Articles de luxe, Doux Poil épais, aussi le prix est plus élevé aussi



Trois supports pour le choix:

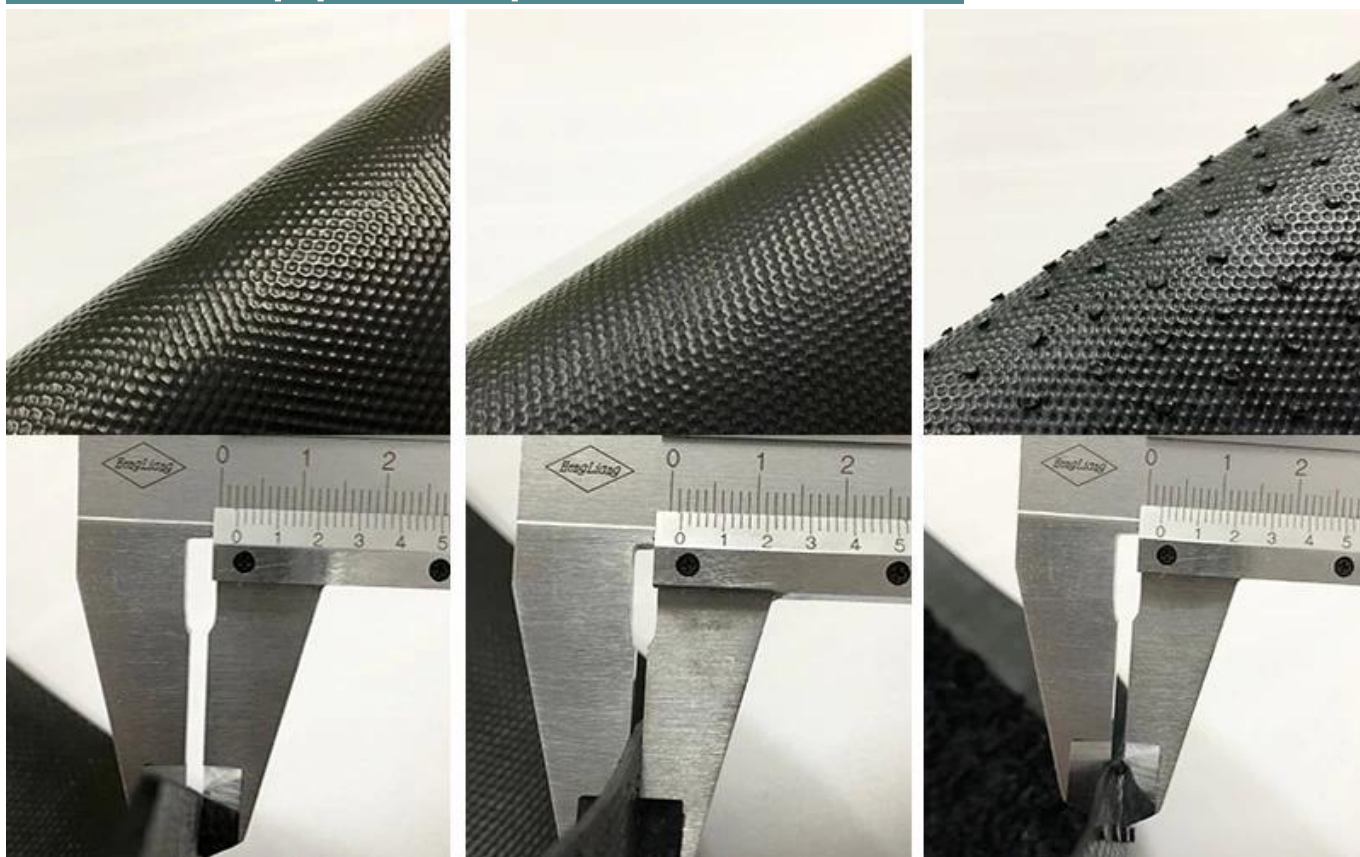

Tailles au choix:

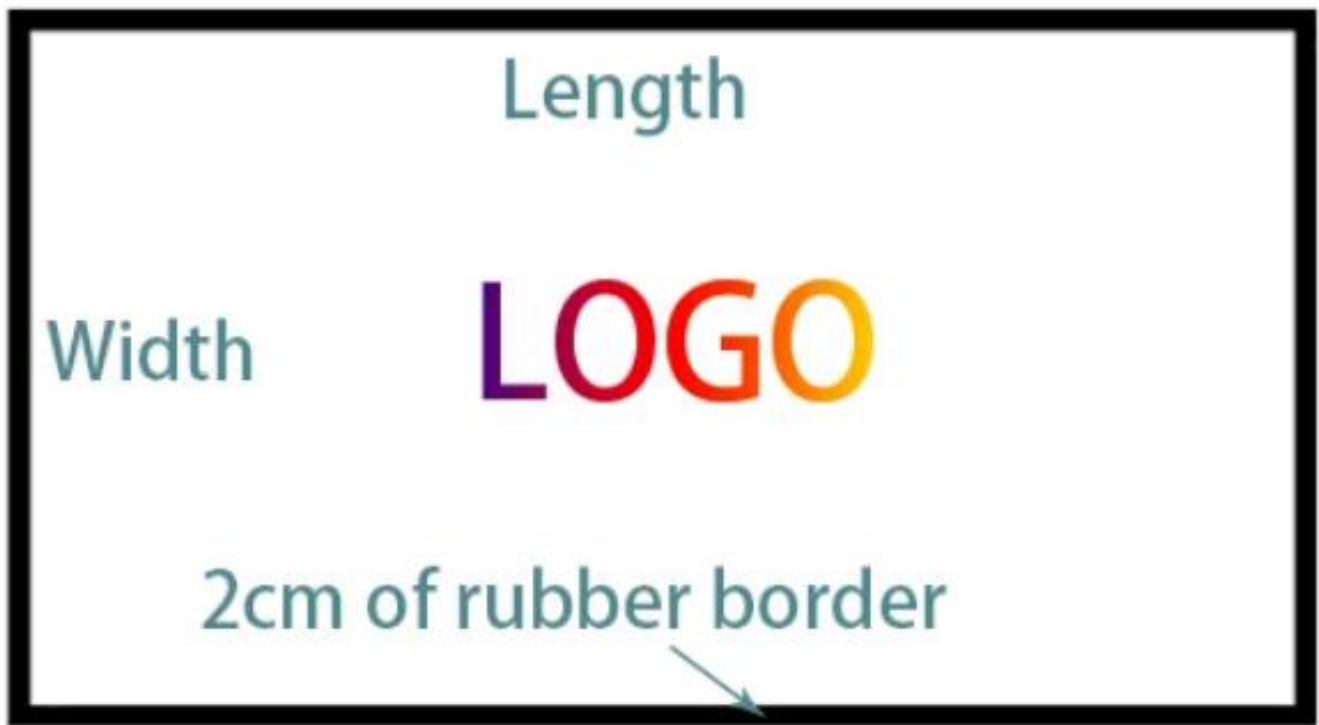

La largeur maximale: 2m

La longueur maximale: pas de limite


Tailles populaires: 40x60cm, 46x74cm, 50x70cm, 50x80cm, 60x90cm, 80x120cm, 120x180cm, tailles personnalisées disponibles.

Vous pouvez choisir n'importe quelle couleur:



Comment nettoyer les tapis:

1. Aspirez les tapis 2. Aspirateur 3. Tuyau Hors nettoyage 4. Pas de machine à laver pls.

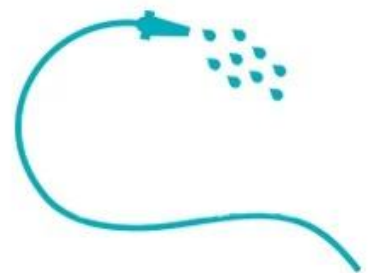

Comment nous produisons les tapis?



Est-ce que nos tapis sont sécuritaires?

Sûr!



Tests Conducted (As Requested By The Applicant)

1 Color Fastness To Washing (AATCC 61-2011; Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 5-15% AATCC WDB Detergent Solution With 50 Steel Balls)

Color Change	4
Color Staining	4.5
-Acetate	4
-Cotton	4.5
-Nylon	4.5
-Polyester	4.5
-Acrylic	4.5
-Wool	4.5

2 Color Fastness To Crocking (AATCC 8-2007)

Dry	4.5
Wet	4.5

3 Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp)

20 Hours Exposure	4
Grade	4

Tests Conducted (As Requested By The Applicant)

4 Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631)

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-72).

Requirements

- (1) Test Criterion:
The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flammability Frame At Any Point.
- (2) Acceptance Criterion:
At Least 7 Of The 8 Specimens Must Meet The Test Criterion For The Material To Be Classified As Resistance To Flammability.

Test Result :

The Nearest Distance From Burnt Area To The Frame Edge

Original	0.0
1.7	3.5
1.6	3.7
1.6	3.8
3.8	3.7

Interpretation Of Test Result :

Number Of Specimens	8
Met The Test Criterion	8

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek also does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as it is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations other than those implied with respect to this report and as provided for in these terms and conditions. We have aimed to conduct the service on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct.

nous Pourrait Montrer Toi Certains Tapis nous
 s fabriqué:



Toutes les autres questions, envoyez-nous simplement un courriel ou faites un appel!