

Make Your Own LOGO Mat

Pick the Colors

Measure the Size

Then go ahead >>

Instruction personnalisée

& gt; Longue Durable Jet

d'encre Impression Logo sur la Nylon Fibre avec Antidérapant Naturel Caoutchouc Support.

& gt; Non Limitation sur Les dessins, Couleurs & Taille.

& gt; Parfait Façon à Promouvoir Votre Compagnie Image.

& gt; UNE Sol Tapis avec un Attraper les yeux Conception cette pouvez Améliorer l'image de marque et Commercialisation Efforts.

& gt; Tous les deux pour Intérieur & De plein air Emplacements

Vous avez 4 choix concernant les piles en nylon:


& gt; Article# DK-2450: support en caoutchouc 3mm / 450gsm + 2mm / 2000gsm
Compétitif Prix, Inférieur Pile La taille, Meilleur Choix pour Compliqué Des dessins



& gt; Article# DK-2000: 4mm /600gsm Nylon + 2support en caoutchouc mm /

2000gsm

Plus Populaire Articles, Inférieur Torsion Pile, Meilleur Vendre pour NOUS Marché

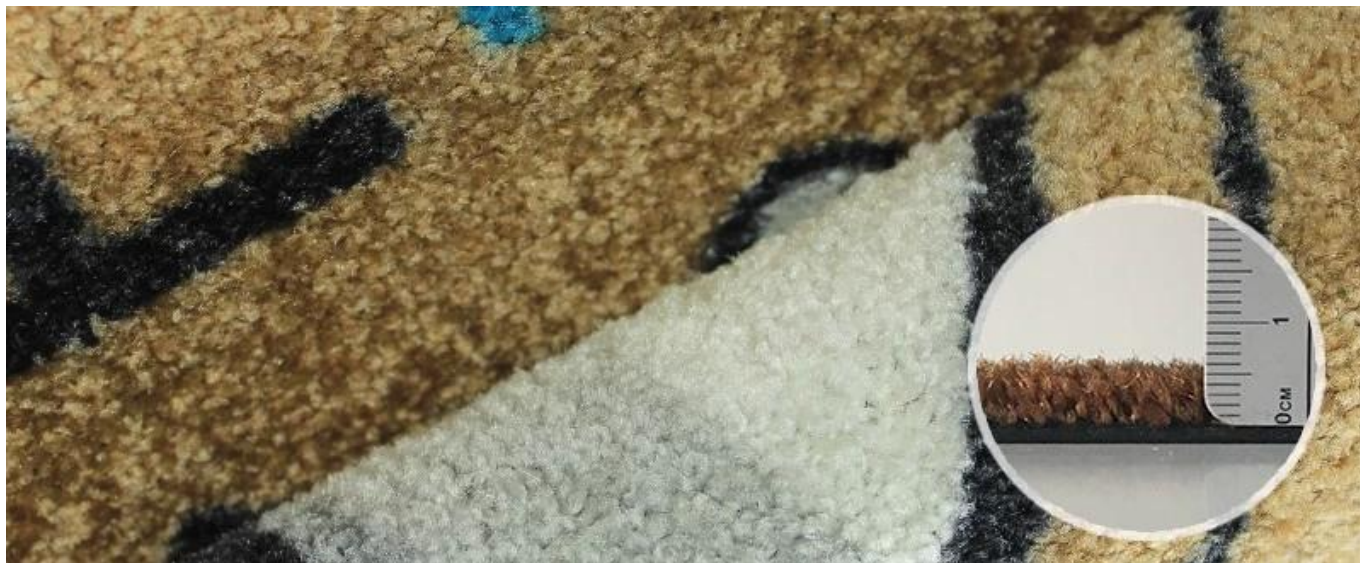

& gt; Article# DK-2200: 5mm /700gsm Nylon + 2support en caoutchouc mm / 2000gsm

Plus haute Torsion Pile, Plus lourd Devoir Article pour Choix




& gt; Article# DK-2300: 7mm / 950gsm Nylon + 2support en caoutchouc mm / 2000gsm


Articles de luxe, Doux Poil épais, aussi le prix est plus élevé aussi



Trois supports pour le choix:

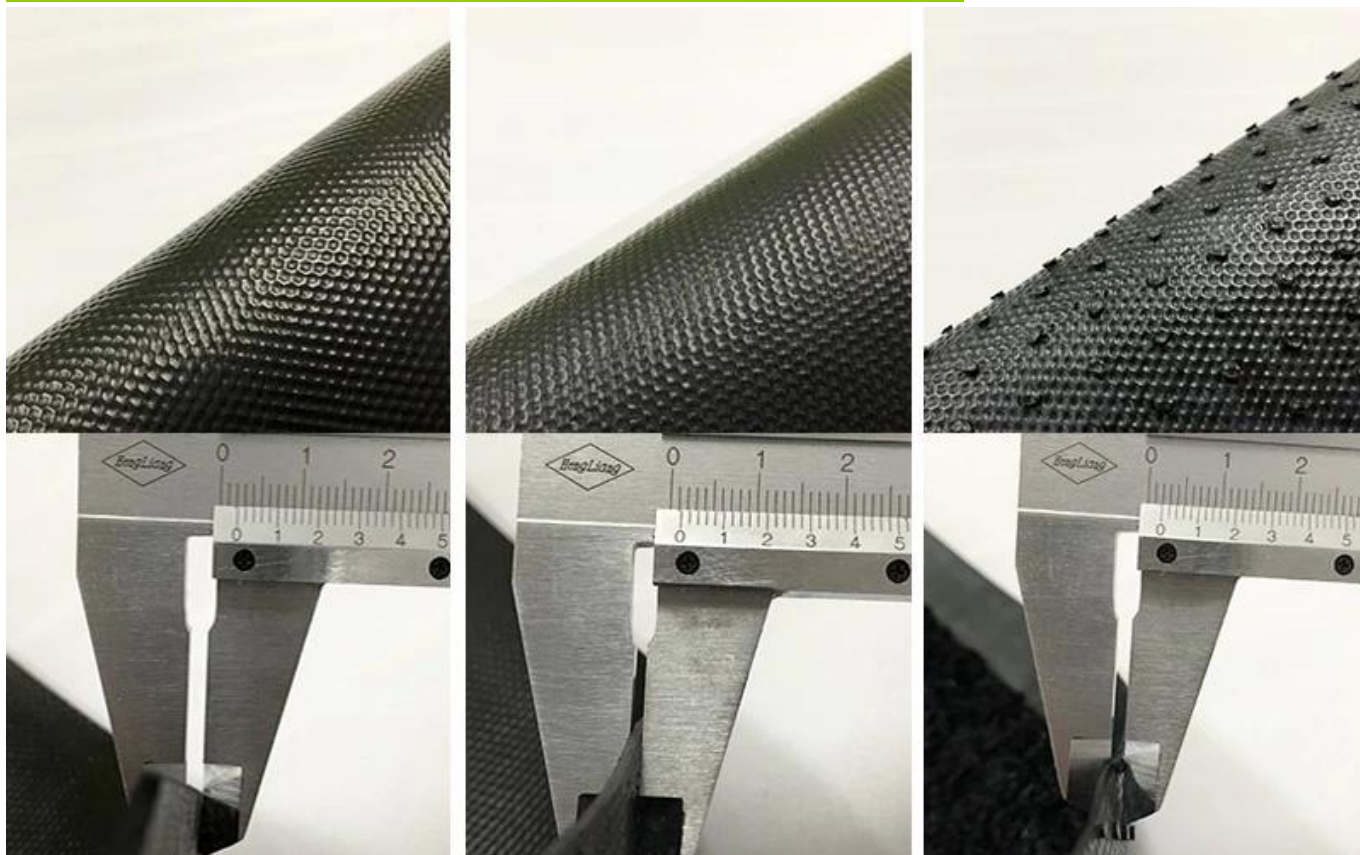

Tailles au choix:

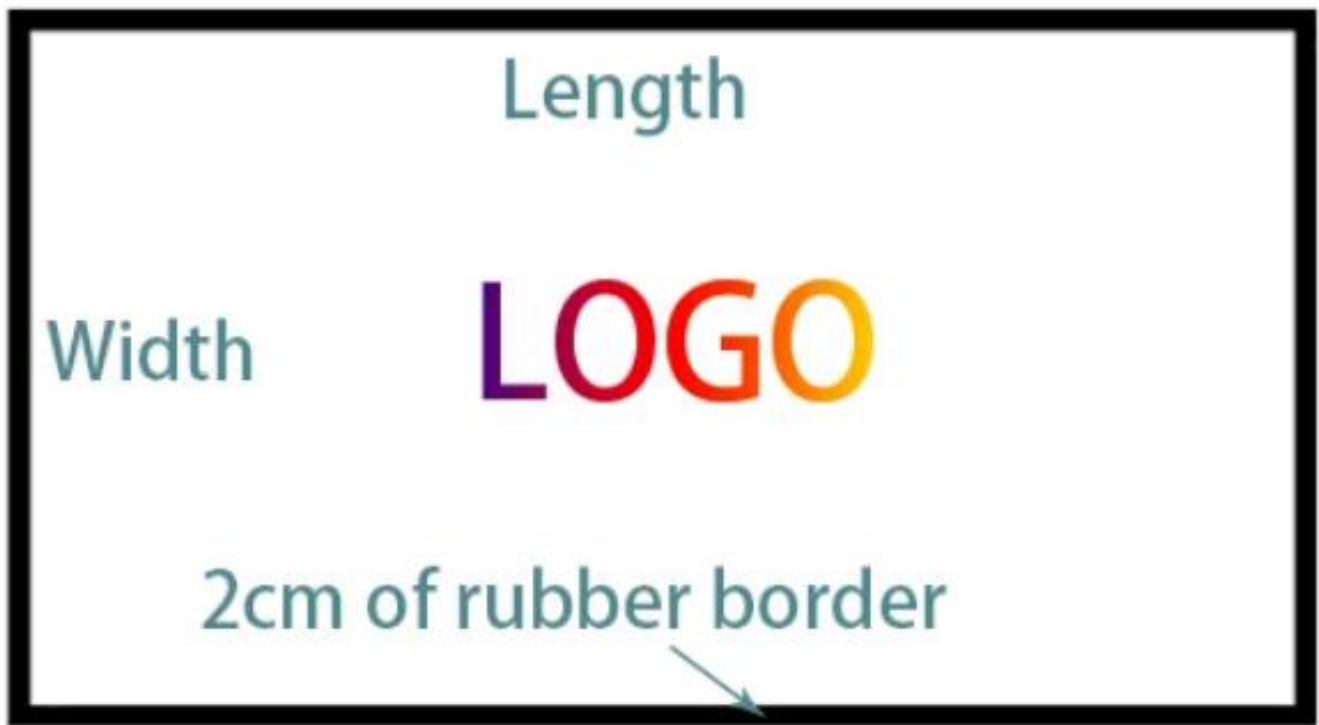

La largeur maximale: 2m

La longueur maximale: pas de limite


Tailles populaires: 40x60cm, 46x74cm, 50x70cm, 50x80cm, 60x90cm, 80x120cm, 120x180cm, tailles personnalisées disponibles.

Vous pouvez choisir n'importe quelle couleur:



Comment nettoyer les tapis:

1. Aspirer les tapis 2. Aspirateur 3. Tuyau Hors nettoyage 4. Pas de machine à laver pls.

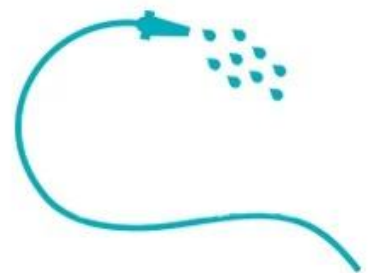

Comment nous produisons les tapis?



Nos tapis sont-ils sécuritaires? Sûr!

SGS TEST REPORT
 No. : S29L121000440
 Date : Oct. 16, 2012
 Page : 1 of 2

SHENZHEN DUTTIUM HOUSEWARE PRODUCTS CO., LTD
 RM 607-608, NINGBO MACHINERY-ELECTRICAL BLDG. #7, BRIDA RD, SHENZHEN, CHINA 518029

The following sample(s) were submitted and analyzed on behalf of the client as:

Sample Name: NYLON PRINTED MAT WITH RUBBER BACKING
 SGT Ref No: Q298116100000
 Material: NYLON-RUBBER
 Spec: 60x100CM
 Manufacturer: SHENZHEN DUTTIUM HOUSEWARE PRODUCTS CO., LTD
 Test Performed: Selected tests as requested by applicant
 Date of Report: Oct. 11, 2012
 Test Period: Oct. 11, 2012 to Oct. 16, 2012

Test Results: Please refer to the following page(s):
 *****To be continued*****

Signed for and on behalf of
 SGT/CPTC Lab
Zamber
 Senior L
 Authorized Signatory

SGS 0182255

SGS TEST REPORT
 No. : S29L121000440
 Date : Oct. 16, 2012
 Page : 2 of 2

Test Information:
 Sample description: See photo
 Lab environment condition: 23±2°C, 50%RH

No.	Test item	Test method	Test condition	Test result
1	Water absorption	ASTM D 1570-02 (2005) Procedure A	Specimen: 200x100x5mm Environment condition: 23±2°C, 50%	0.000g/cm ² (See table 1)

Note: 1. Water absorption, g/m² x 2 (flat water absorption) - total dry before
 2. All test specimens were cut from the sample.
 3. The document was controlled by a SGS laboratory.

Photo:

SGS 0182255

Tests Conducted (As Requested By The Applicant)

3 Color Fastness To Washing (AATCC 61-2011; Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 5-15% AATCC WDB Detergent Solution With 50 Steel Balls)

Color Change	4
Color Staining	4.5
-Acetate	4
-Cotton	4.5
-Nylon	4.5
-Polyester	4.5
-Acrylic	4.5
-Wool	4.5

2 Color Fastness To Crocking (AATCC 8-2007)

Dry	4.5
Wet	4.5

2 Color Fastness To Light (AATCC 16-2004, Option 2, Xenon-Arc Lamp)

20 Hours Exposure	4
Grade	4

Tests Conducted (As Requested By The Applicant)

4 Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631)

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-72).

Requirements

- (1) Test Criteria:
The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flammability Frame At Any Point.
- (2) Acceptance Criteria:
At Least 7 Of The 8 Specimens Must Meet The Test Criteria For The Material To Be Classified As Resistance To Flammability.

Test Result :

The Nearest Distance From Burnt Area To The Frame Edge

Original	0.0
1.7	3.5
1.6	3.7
1.6	3.8
3.8	3.7

Interpretation Of Test Result :

Number Of Specimens	8
Met The Test Criteria	8

nous Pourrait Montrer Toi Certains Tapis nous fabriqués



Toutes les autres questions, envoyez-nous simplement un courriel ou faites un appel!