المعطي على مستوى حلقة الحل مصبوغ السجاد البولي بروبلين السجاد التجاري
الاستخدام

场景实拍图
HX301-01

场景实拍图
HX301-02

场景实拍图
HX301-04

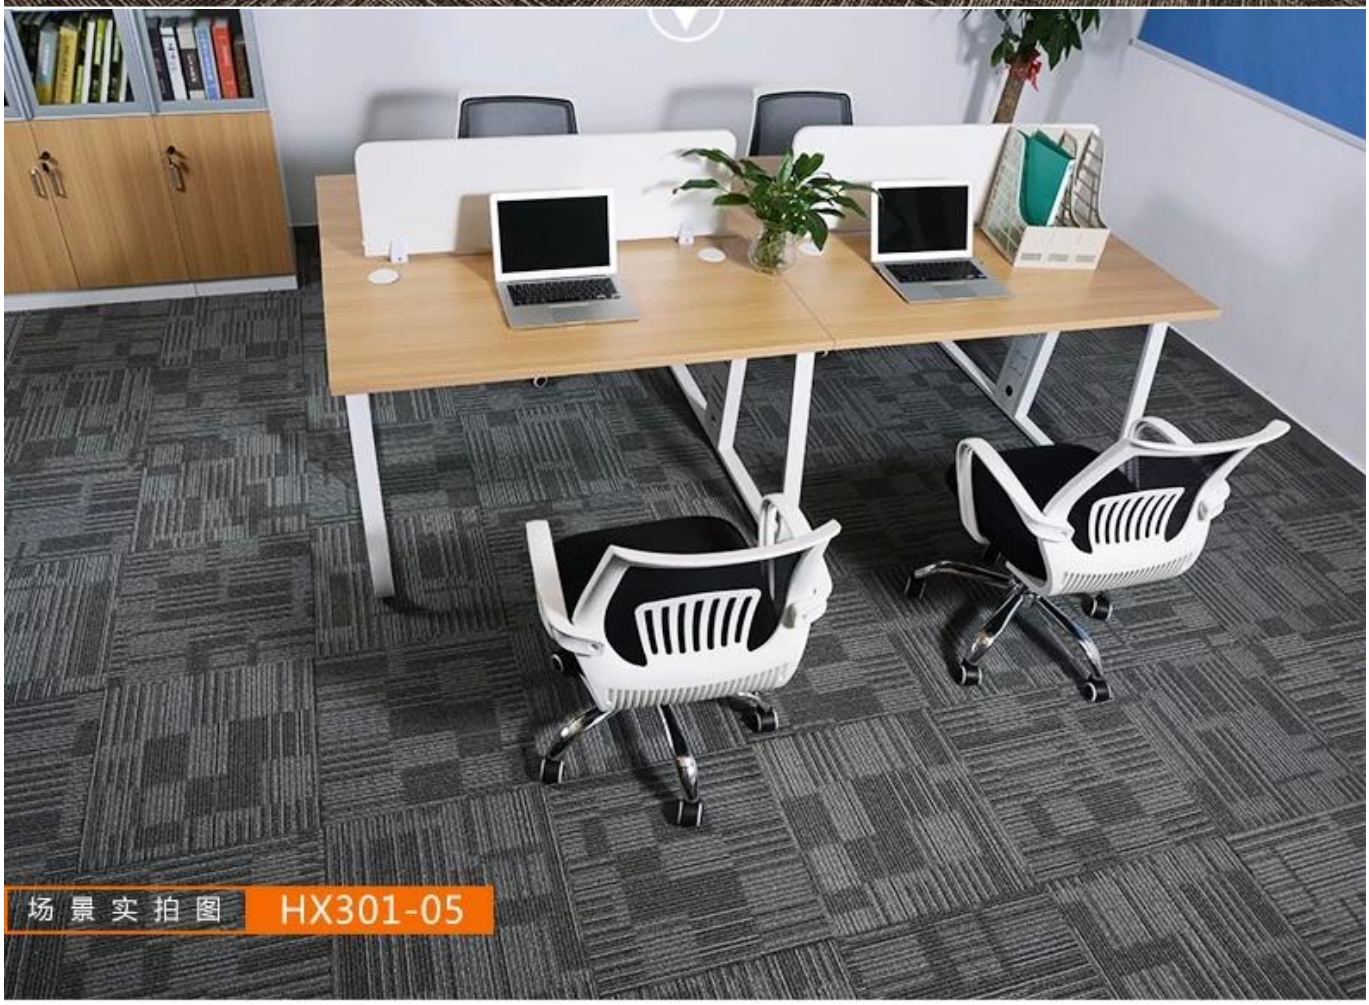
场景实拍图
HX301-05

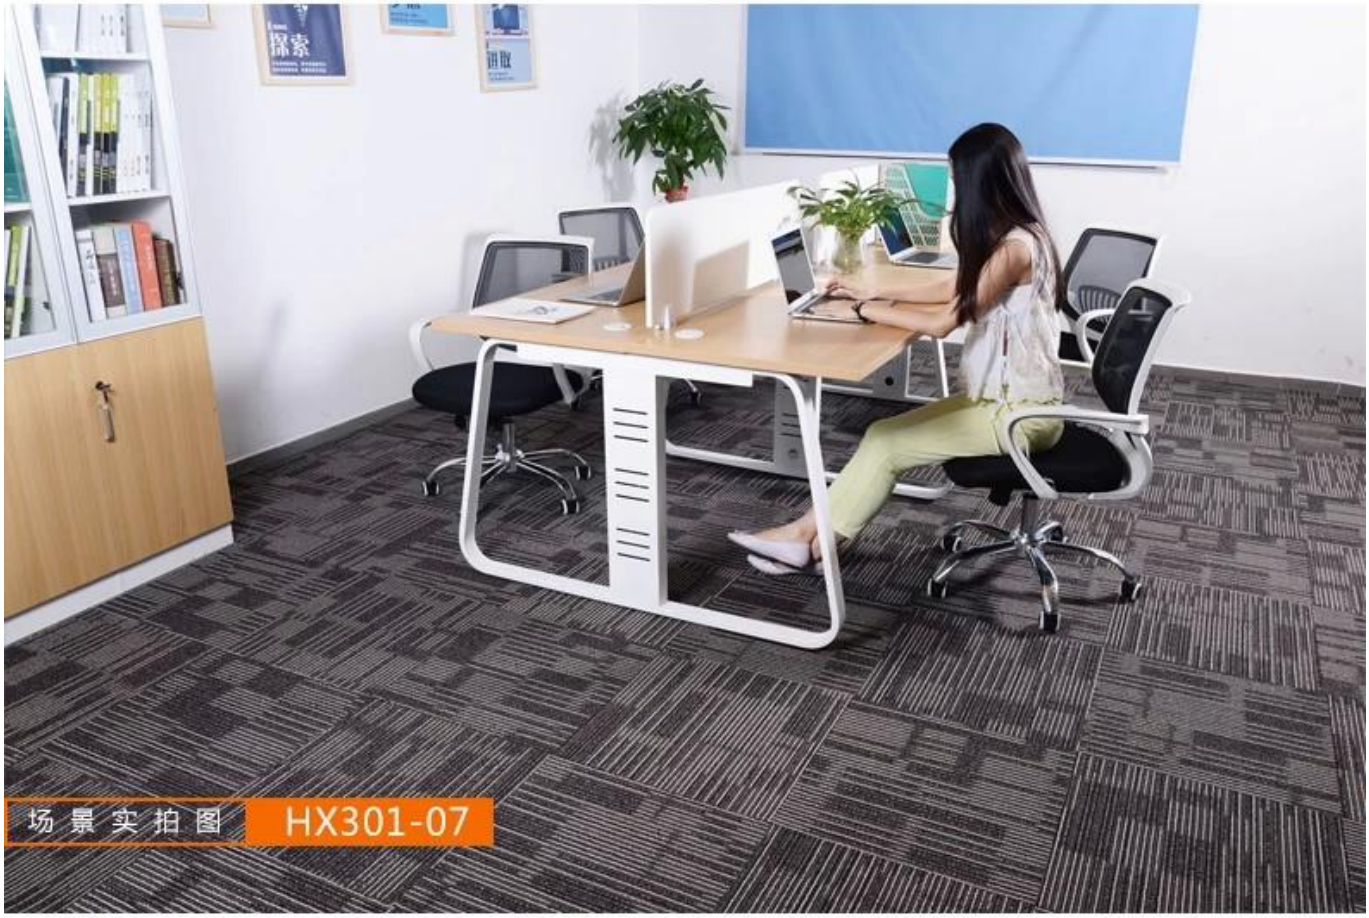
场 景 实 拍 图
HX301-07

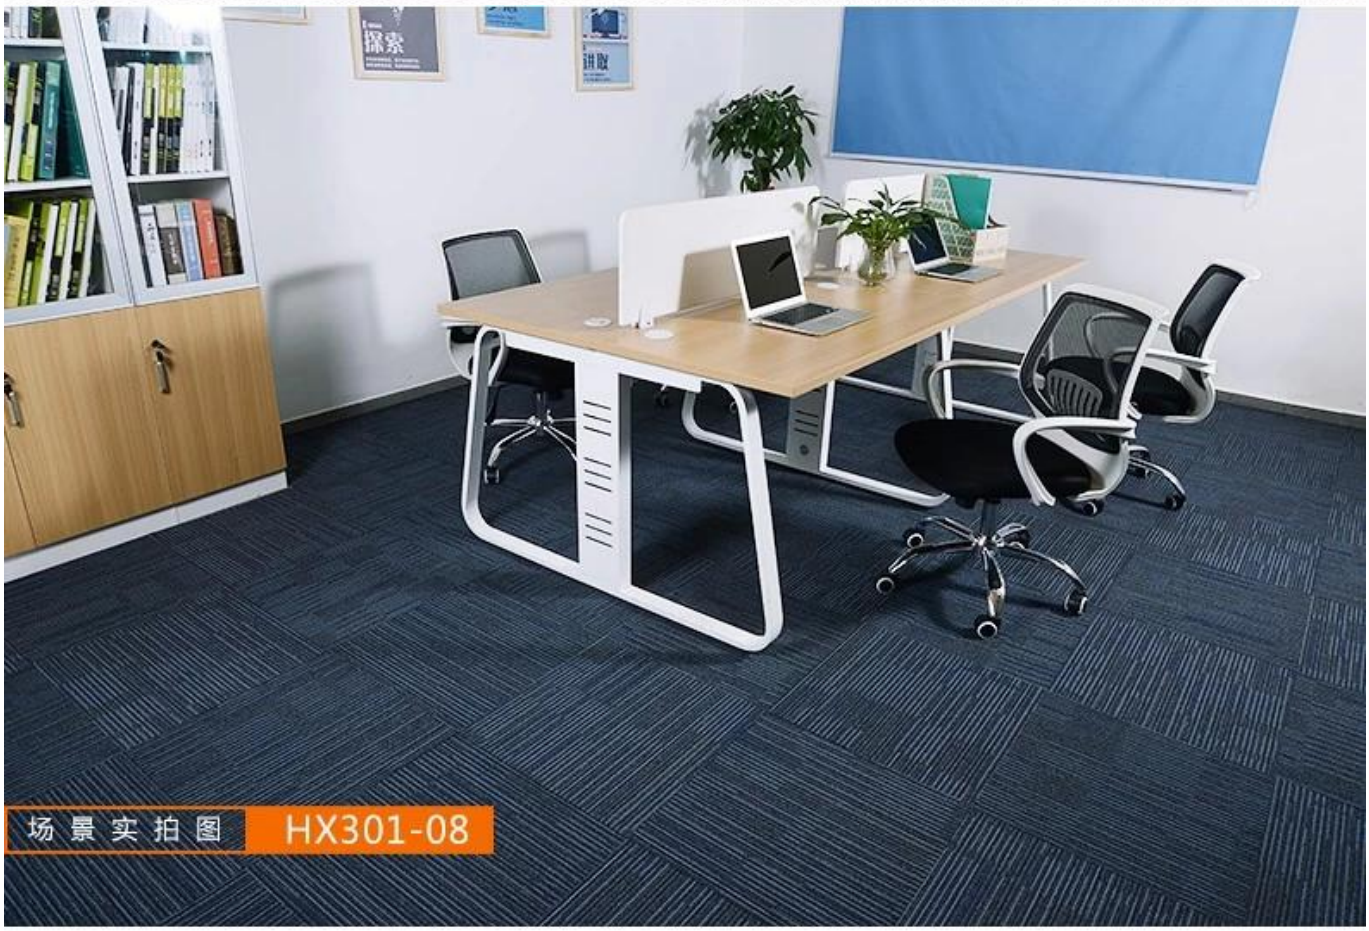
场 景 实 拍 图
HX301-08

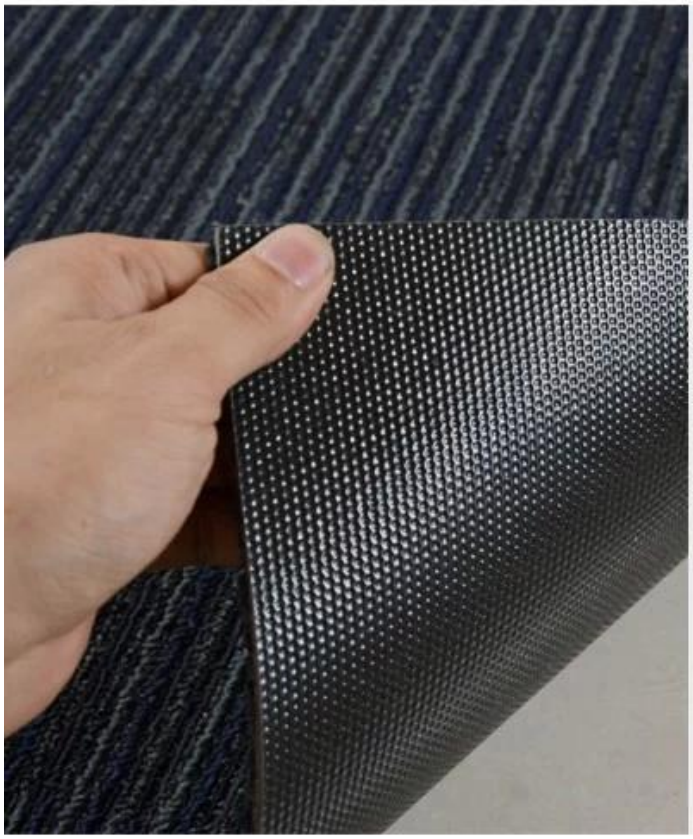

PVC底部 防水 固绒 耐折

PVC BOTTOM WATERPROOF SOLID PROOF

DK-HX301

01

02

04

05

07

08

DK-HX102

DK-HX201

DK-HXTJ

01

02

03

04

05

06

07

08

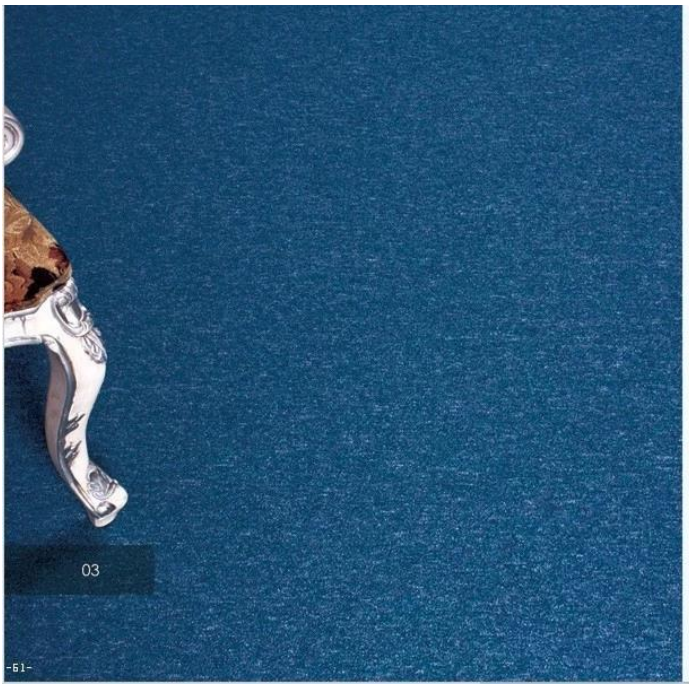

CP030

Construction: Multi-level Loop
Yarn: 100% BCF Polypropylene
Coloration: Solution dyed
Gauge: 5/64"
Pile Weight: 580g/sq.m(20.5oz/sq.yd)±5%
Pile Height: 4±0.5 mm,
Total Thickness: 5.5±0.5 mm
Backing: SI-PVC
Size: 500 x 500 mm
Package: 24pcs/box(6㎡)

Approved Installation Methods:



• Colors

▲ 02

▲ 03

▲ 05

▲ 11

▲ 18

▲ 56

▲ 93

CP031

Construction: Multi-level Loop
Yarn: 100% BCF Polypropylene
Coloration: Solution dyed
Gauge: 1/10"
Pile Weight: 560g/sq.m(19.8oz/sq.yd)±5%
Pile Height: 4±0.5 mm,
Total Thickness: 5.5±0.5 mm
Backing: SI-PVC
Size: 500 x 500 mm
Package: 24pcs/box(6㎡)

Approved Installation Methods:



Colors

CP032

Construction: Multi-level Loop
Yarn: 100% BCF Polypropylene
Coloration: Solution dyed
Gauge: 1/10"
Pile Weight: 560g/sq.m(19.8oz/sq.yd)±5%
Pile Height: 4±0.5 mm,
Total Thickness: 5.5±0.5 mm
Backing: SI-PVC
Size: 500 x 500 mm
Package: 24pcs/box(6㎡)

Approved Installation Methods:

Colors

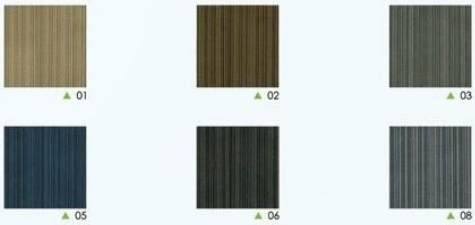

CP033

Construction: Multi-level - Loop, Tufted
Yarn: 100% BCF Polypropylene
Coloration: Solution dyed
Gauge: 1/12"
Pile Weight: 670g/sq.m(23.6oz/sq.ft)±5%
Pile Height: 5±0.5 mm
Total Thickness: 7.5±0.5 mm
Backing: Double PVC with glass fibre
Size: 500 x 500 mm
Package: 20pcs/box(5㎡)

Approved Installation Methods:

• Colors

CP035

Construction: Multi-level Loop
Yarn: 100% BCF Polypropylene
Coloration: Solution dyed
Gauge: 1/12"
Pile Weight: 600g/sq.m(21.2oz/sq.yd)±5%
Pile Height: 5±0.5 mm.
Total Thickness: 7.5±0.5 mm
Backing: SI-PVC
Size: 500 x 500 mm
Package: 24pcs/box(6㎡)

Approved Installation Methods:

• Colors

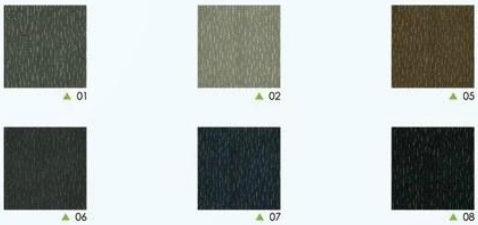

□□□□□□□□ □□□□□:

تلوين اللون AATCC 165 من السجاد & أمبير ؛ النزعة Eletrostatic اختبار: AATCC 134

抗静电检验报告AATCC 134

Test No: 124277

Independent Textile Testing Service, Inc.

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itdab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC 134-1996
Electrostatic Propensity of Carpets

Purpose and Scope

This test method is designed to assess the static generating propensity of carpets developed when a person walks across them by controlled laboratory simulation of conditions which may be met in practice, and more particularly, with respect to those conditions which are known from experience to be strongly contributory to excessive accumulation of static charges.

Test Conditions:
Chamber Temperature: 70° F.
Chamber Relative Humidity: 20%

Test Results:	Sole	Underlay	Maximum Voltage 1 (kV)	Maximum Voltage 2 (kV)	Averages (kV)
Test I Step Test	Neolite	Plate	Neg. 0.3	Neg. 0.5	Neg. 0.4
Test II Scuff Test	Neolite	Plate	Neg. 0.2	Neg. 0.3	Neg. 0.3
Test III Step Test	Leather	Plate	Neg. 0.1	--	--
Test IV Scuff Test	Leather	Plate	Pos. 0.2	--	--

Soles:
a) Neolite XS 664
b) Suede Leather

Underlayment:
a) Plate: Earth grounded metal plate
b) H/J: Standard 40 oz./yd2 rubberized Hair/Jute cushion

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the samples tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

色牢度检验报告AATCC 165

Test No: 124277

Independent Textile Testing Service, Inc.

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itdab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC Test Method 165
Colorfastness to Crocking: Carpets

Purpose and Scope

This test method is designed to determine the degree of color transfer from the surface of carpets to other surfaces by rubbing. The intent is to reproduce as nearly as possible true-to-life situations in all constructions whether dyed, printed or otherwise colored.

Procedure

Test procedures employing white test cloths, both dry and wet with water are given.

Test Specimen Identification	Wet Crocking Rating	Dry Crocking Rating
See Above	5	5

Key to Ratings	
5	Negligible or no stain
4	Slight stain
3	Noticeable stain
2	Considerable stain
1	Severe stain

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to which they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the samples tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

□□□□□□□□□: AATCC 16E Colorfastness □ □□□□□ & □□□□□ AATCC 175 □□□□□ □□□□□□

耐光色牢度检验报告AATCC 16E

Independent Textile Testing Service, Inc.

Test No: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itttslab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC Test Method 16 Option E
Colorfastness to Light (Water-Cooled Xenon Arc)

Purpose and Scope

This test method provides the general principles and procedures which are currently in use for determining the colorfastness, to light of textile materials.

Procedure

Samples of the textile material to be tested and the agreed upon comparison standard(s) are exposed simultaneously to a light source under specified conditions. The colorfastness to light of the specimen is evaluated by comparison of the color change of the exposed portion to the masked or control portion of the test specimen using the AATCC Gray Scale for Color Change or by instrumental color measurement.

Test Specimen Identification	Number of Cycles	Rating
See Above	2 (40 AFU's)	5

Key to Ratings	
5	Negligible or no change
4	Slight change
3	Noticeable change
2	Considerable change
1	Severe change

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

抗污性能检验报告AATCC 175

Independent Textile Testing Service, Inc.

Test No: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itttslab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC Test Method 175-2003
Stain Resistance: Pile Floor Coverings

Purpose and Scope

This test method is intended for use on pile floor coverings to determine the resistance to staining by acid food colors.

Procedure

A specimen of pile floor covering is stained with a small volume of a diluted aqueous solution of Food Drug & Cosmetic (FD&C) Red 40 adjusted to an acid pH. After allowing the stained specimen to remain at controlled conditions for 24 ± 4 hours, it is rinsed in water to remove all unused FD&C Red 40 dye. Any residual stain is assessed after drying.

Test Sample Rating	9

Table I. Rating Scale

AATCC Stain Resistance	
Grade Number	Definition
10	No residual stain
1	Severe residual stain

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

ASTM E648 □□□ □□□□□□□ □□□□ □□□□□□ & amp□ ASTM D 2859 □□□□□□□□ □□□□□□

阻燃检验报告ASTM E648

Independent Textile Testing Service, Inc.

Test Number: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itslab.com

Test Report

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with ASTM E 648-06 and/or Federal Test Method 372. NFPA 253

FLOORING RADIANT PANEL TEST

Sample Description

Green Tiles

Test Assembly

Mounted on 6mm FRC Board
(Using Premium Multi Purpose Adhesive)

Test Results	Specimen No. 1	Specimen No. 2	Specimen No. 3
Critical Radiant Flux	0.51 watts/cm²	0.65 watts/cm²	0.67 watts/cm²
Total Burn Length	39.0 cm	32.0 cm	31.0 cm
Flame Front Out	56.0 minutes	26.0 minutes	45.0 minutes

Average Critical Radiant Flux **0.61 watts/cm²**

Estimated Standard Deviation **0.09 watts/cm²**

14.3% coefficient of variation

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

阻燃检验报告ASTM D 2859

Independent Textile Testing Service, Inc.

Test Number: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@itslab.com

Test Report

Customer:

Subject: **"Consumer Product Safety Commission (CPSC) FF 1-70"**
"16 CFR 1630"
"ASTM D 2859-96"
"Consumer Product Safety Improvement Act"

Scope: This test method covers the determination of the flammability of finished textile floor covering materials when exposed to an ignition source under controlled laboratory conditions. It is applicable to all types of textile floor coverings regardless of the method of fabrication or whether they are made from natural or man-made fibers.

FLAMMABILITY TEST REPORT

STYLE	COLOR	ROLL	TESTED	PASSED
Green Tiles	–	–	8	8

CPSIA Consumer Product Safety Commission Accredited Laboratory: ID 1258

NVLAP

APPROVED
MEETS OR EXCEEDS
FEDERAL FLAMMABILITY
STANDARD CPSC FF 1-70

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

ASTM E662 (1) □□□□□□ □□□□□ □□□□□□

烟密度检验报告ASTM E662(1)

Independent Textile Testing Service, Inc.

Test Number: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance:	2.5 watts/cm^2	G Factor	132
Thermal Exposure:	Flaming		
Furnace Voltage:	100		
Burner Fuel:	Propane		

Sample Description

Green Tiles

Test Results

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H_2O			
Minimum Transmittance (TM), %	88%	84%	92%	
at, minutes	9.40	9.73	10.13	9.75
Maximum Specific Optical Density (DM)	139	142	137	139
Clear Beam, (DC)	14	20	16	17
DM, CORRECTED (DMC)	125	122	121	123
Specific Optical Density at 1.5 minutes	16	26	23	22
Specific Optical Density at 4.0 minutes	89	105	87	94
Time to 90% DM, minutes	6.90	6.55	7.17	6.87
Time to DS = 16, minutes	1.55	1.35	1.30	1.40

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

烟密度检验报告ASTM E662(2)

Independent Textile Testing Service, Inc.

Test Number: 124277

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance:	2.5 watts/cm^2	G Factor	132
Thermal Exposure:	Non-flaming		
Furnace Voltage:	100		
Burner Fuel:	--		

Sample Description

Green Tiles

Test Results

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H_2O			
Minimum Transmittance (TM), %	18%	52%	30%	
at, minutes	12.30	13.03	12.13	12.49
Maximum Specific Optical Density (DM)	494	433	465	464
Clear Beam, (DC)	2	2	2	2
DM, CORRECTED (DMC)	492	431	463	462
Specific Optical Density at 1.5 minutes	1	1	1	1
Specific Optical Density at 4.0 minutes	43	36	46	42
Time to 90% DM, minutes	8.77	9.30	9.08	9.05
Time to DS = 16, minutes	3.28	3.40	3.27	3.32

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Test: ASTM D 1335 Tuft Bind of Pile Floor Coverings & amp AACHEN ITTS 004 Dimensional Stability

内在与外在质量检验报告ASTM D 1335

Test No: 124277

Independent Textile Testing Service, Inc.

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer:

Subject: Sample(s) submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
ASTM D 1335 Tuft Bind of Pile Floor Coverings

Scope:

This test method covers the determination of the force required to pull a tuft completely out of a cut pile floor covering or to pull one or both legs of a loop free from the backing of looped pile floor coverings.

Test Results

1)	8.5	6)	7.2	11)	9.5
2)	10.8	7)	10.8	12)	9.5
3)	7.9	8)	5.9	13)	8.9
4)	8.2	9)	9.4	14)	6.2
5)	10.4	10)	10.5	15)	11.0

Average Tuft Bind: 9.0 lbs.

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

尺寸稳定性检验报告AACHEN ITTS 004

Test No: 124277

Independent Textile Testing Service, Inc.

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
ITTS 004
AACHEN Dimensional Stability

Purpose and Scope
This test procedure measures the dimensional stability of textile floor coverings both modular and broadloom when subjected to varied moisture, heat and dry conditions.

Test Condition	Measurement	Percent Change
M_0	19.6750	
MT_1	19.6688	-0.032
MT_2	19.6763	+0.006
MT_3	19.6638	-0.057
MT_4	19.6688	-0.032 -0.0062"

Test Condition	Measurement	Percent Change
C_0	19.6925	
CT_1	19.6888	-0.019
CT_2	19.6925	0.000
CT_3	19.6850	-0.038
CT_4	19.6913	-0.006 -0.0012"

Test Condition Key

M_0 Machine Direction Original Measurement
C_0 Cross Direction Original Measurement
T_1 Two (2) hours in an oven at 60° C
T_2 Two (2) hours in a .1% solution at 20° C
T_3 Twenty-four (24) hours in an oven at 60° C
T_4 Forty-eight (48) hours in standard climate at 21° C & 65% RH

President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive out prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Call
(86) 755 82132292
Or
Enquiry Now
for more style