


Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#2: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"

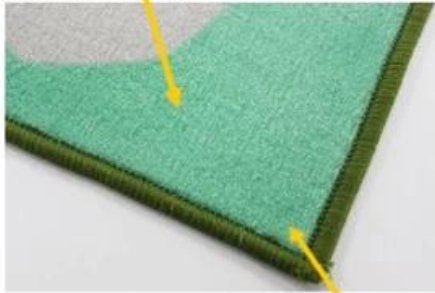

Nylon Loop pile can absorb water effectively

Pattern#2: Latex Backing

Latex Backing makes mats more anti-slip

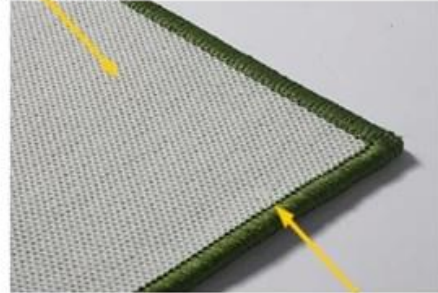

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- Latex backing to avoid slidign
- Stylish and mutiple designs for your option



Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#3: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Nylon Loop pile can absorb water effectively

Pattern#3: TPR Backing

TPR Backing makes mats more anti-slip

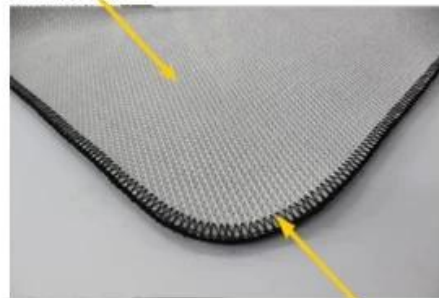

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- TPR backing to avoid slidign
- Stylish and mutiple designs for your option



Certification:

ITTC
No. 390 Gongwen Road, Fengxian District Shanghai, China 201413
Tel: (86-21) 5755 4800 Fax: (86-21) 5755 4819

Test Report No. 26796010

Client Information:
Supplier No. 26000
Client Company Name: [Redacted]
Contact Address: No. 110, Gongwen Road, Shanghai, Shanghai
Client Contact Person: Li Changmei
WEA Contact Person: Kenneth
Sample Receive Date/Test Start Date: 25/09/13

Sample information by applicant:
Article No. 802407089240709
Article Name: Bagging
Article Date Stamp: 1311
Material Producer: [Redacted]
Material Description: [Redacted]
Material Batch Number/Production Date: [Redacted]
Test type: Production Test
Sample Class: Blue

Test Method:
Formaldehyde content in textile, ISO 14184-1
pH value in textile, ISO 3071

Determination Of Formaldehyde (Refer To ISO 14184-1, AA-300792-4, ISO-PHQ-0032, AA-707372-2, ISO 14184-1: 2011)

Formaldehyde content (mg/kg)		WEA Limit
Mean value	Not detectable	1
No.	1	2
Individual value	Not detectable	Not detectable

Remarks:
• Value below 10 ppm is reported as 'Not detectable'.
• The standard curve is performed within 2 weeks.
• The concentration of formaldehyde stock solution is certified by Hach-Lange.

Determination Of pH Of Aqueous Extract (Refer To ISO 3071: 2005, extract by distilled water)

pH Value		WEA Limit
6.5		7

Temperature of extracting solution, °C: 24
pH of distilled water: 6.18

End of Report

Test Report No. 26796010 Page 2 of 2

Formaldehyde content (mg/kg)

Not detectable

1

Not detectable

once a month

