


Fliesen schwarzKommerzielle Teppichhersteller Grey Berber Square Carpet Tiles


Aufmachungeine attraktive Erscheinung, Funktionalität und Flexibilität bei der Installation, DotcomTeppichfliesen bieten den Kunden einen erheblichen Gestaltungsspielraum. AndereWesentliche Merkmale sind feuerhemmend, Haltbarkeit und AntistatikLeistung sowie Größe und Dimensionstabilität.

Muster nach Wahl - DK-B00-Serie:

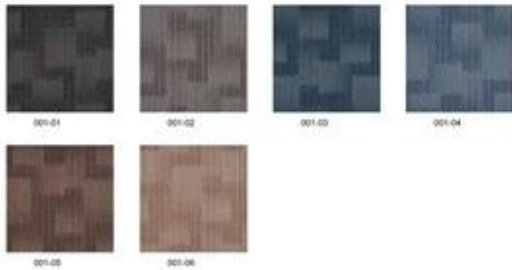

| SPECIFICATION | | 基本参数 | |
|---------------|----------------------|------|----------------------|
| Description | Carpet Tiles | 系列 | 方格地毯 |
| Tile Material | Nylon | 阻燃等级 | 阻燃 |
| Structure | 1/4" x 1/4" Tile | 适用场所 | 1/4" x 1/4" Tile |
| Tile Height | 5-2.5 mm | 厚度 | 5-2.5 mm |
| Tile Weight | 380 g/m ² | 重量 | 380 g/m ² |
| Backing | PVC | 底料 | PVC |
| Dimensions | 50 cm x 50 cm | 规格 | 50 cm x 50 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版权所有，翻印必究。

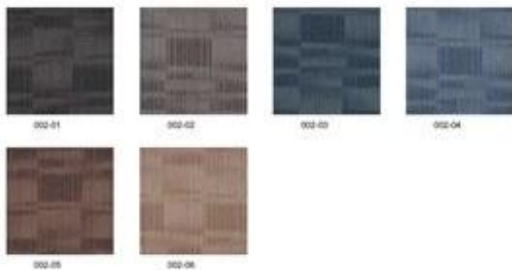

| SPECIFICATION | | 基本参数 | |
|---------------|----------------------|------|----------------------|
| Description | Carpet Tiles | 系列 | 方格地毯 |
| Tile Material | Nylon | 阻燃等级 | 阻燃 |
| Structure | 1/4" x 1/4" Tile | 适用场所 | 1/4" x 1/4" Tile |
| Tile Height | 5-2.5 mm | 厚度 | 5-2.5 mm |
| Tile Weight | 380 g/m ² | 重量 | 380 g/m ² |
| Backing | PVC | 底料 | PVC |
| Dimensions | 50 cm x 50 cm | 规格 | 50 cm x 50 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版权所有，翻印必究。





| SPECIFICATION | |
|----------------|----------------------|
| Description | Carpet Tile |
| Fibre Material | Nylon |
| Structure | 1/4" x 1/4" Pile |
| Pile Height | 5-2.5 mm |
| Pile Weight | 360 gsm ² |
| Backing | PVC |
| Dimensions | 30 cm x 30 cm |

| 中文參數 | |
|------|----------------------|
| 說明 | 方格地毯 |
| 纖維材料 | 尼龍 |
| 結構 | 1/4" x 1/4" 方格 |
| 高度 | 5-2.5 mm |
| 重量 | 360 gsm ² |
| 底層 | PVC |
| 規格 | 30 cm x 30 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。



| SPECIFICATION | |
|----------------|----------------------|
| Description | Carpet Tile |
| Fibre Material | Nylon |
| Structure | 1/4" x 1/4" Pile |
| Pile Height | 5-2.5 mm |
| Pile Weight | 360 gsm ² |
| Backing | PVC |
| Dimensions | 30 cm x 30 cm |

| 中文參數 | |
|------|----------------------|
| 說明 | 方格地毯 |
| 纖維材料 | 尼龍 |
| 結構 | 1/4" x 1/4" 方格 |
| 高度 | 5-2.5 mm |
| 重量 | 360 gsm ² |
| 底層 | PVC |
| 規格 | 30 cm x 30 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。



| SPECIFICATION | |
|----------------|----------------------|
| Description | Carpet Tile |
| Fibre Material | Nylon |
| Structure | 1/4" x 1/4" Pile |
| Pile Height | 4-3.2.3 mm |
| Pile Weight | 360 gsm ² |
| Backing | PVC |
| Dimensions | 30 cm x 30 cm |

| 中文參數 | |
|------|----------------------|
| 說明 | 方格地毯 |
| 纖維材料 | 尼龍 |
| 結構 | 1/4" x 1/4" 方格 |
| 高度 | 4-3.2.3 mm |
| 重量 | 360 gsm ² |
| 底層 | PVC |
| 規格 | 30 cm x 30 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。





| SPECIFICATION | | 技術仕様 | |
|---------------|----------------------|------|----------------------|
| Description | Carpet Tile | 品名 | カーペットタイル |
| Tile Material | Nylon | 品名略称 | タイル |
| Structure | 1/2" x 1/2" Pile | 製品規格 | 1/2" x 1/2" Pile |
| Pile Height | 4.5 ± 0.5 mm | 厚さ | 4.5 ± 0.5 mm |
| Pile Weight | 350 g/m ² | 重量 | 350 g/m ² |
| Backing | PVC | 底材 | PVC |
| Dimensions | 50 cm x 50 cm | 規格 | 50 cm x 50 cm |

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 本製品のデザインは、許可なく複製、複製、転売されることができません。すべての権利を留保します。



Verpackungsmethode:



Test: AATCC 134 Elektrostatische Neigung von Teppichen & AATCC 165 Farbechtheit gegen Scheuern

抗静电检验报告AATCC 134

**Independent Textile
Testing Service, Inc.**

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test Report

Test No: 124277

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC 134-1996
Electrostatic Propensity of Carpets

Purpose and Scope

This test method is designed to assess the static generating propensity of carpets developed when a person walks across them by controlled laboratory simulation of conditions which may be met in practice, and more particularly, with respect to those conditions which are known from experience to be strongly contributory to excessive accumulation of static charges.

Test Conditions:
Chamber Temperature: 70° F.
Chamber Relative Humidity: 20%

| Test Results: | Sole | Underlay | Maximum Voltage 1 (kV) | Maximum Voltage 2 (kV) | Average (kV) |
|--------------------|---------|----------|------------------------|------------------------|--------------|
| Test I Step Test | Neolite | Plate | Neg. 0.3 | Neg. 0.5 | Neg. 0.4 |
| Test II Scuff Test | Neolite | Plate | Neg. 0.2 | Neg. 0.3 | Neg. 0.3 |
| Test III Step Test | Leather | Plate | Neg. 0.1 | -- | -- |
| Test IV Scuff Test | Leather | Plate | Pos. 0.2 | -- | -- |

Soles:

- a) Neolite XS 664
- b) Suede Leather

Underlayment:

- a) Plate: Earth grounded metal plate
- b) HIJ: Standard 40 oz./yd² rubberized Hair/Lute cushion


President L. Verr Suddeth

Our files and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our files and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and notes of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

测试文件

色牢度检验报告AATCC 165

**Independent Textile
Testing Service, Inc.**

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test Report

Test No: 124277

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC Test Method 165
Colorfastness to Crocking: Carpets

Purpose and Scope

This test method is designed to determine the degree of color transfer from the surface of carpets to other surfaces by rubbing. The intent is to reproduce as nearly as possible true-to-life situations in all constructions whether dyed, printed or otherwise colored.

Procedure

Test procedures employing white test cloths, both dry and wet with water are given.

| Test Specimen Identification | Wet Crocking Rating | Dry Crocking Rating |
|------------------------------|---------------------|---------------------|
| See Above | 5 | 5 |
| | | |
| | | |

| Key to Ratings | |
|----------------|------------------------|
| 5 | Negligible or no stain |
| 4 | Slight stain |
| 3 | Noticeable stain |
| 2 | Considerable stain |
| 1 | Severe stain |


President L. Verr Suddeth

Our files and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our files and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and notes of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

测试文件

Test: AATCC 16E Farbechtheit gegen Licht & AATCC 175 Fleckenbeständigkeit

耐光色牢度检验报告AATCC 16E

抗污性能检验报告AATCC 175

Test No: 124277

Independent Textile Testing Service, Inc.
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3613 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:
 Subject: Sample(s) of carpet submitted for testing by the customer and identified below:
 Sample Identification: Green Tiles

Test Method Conducted
 AATCC Test Method 16 Option E
 Colorfastness to Light (Water-Cooled Xenon Arc)

Purpose and Scope
 This test method provides the general principles and procedures which are currently in use for determining the colorfastness, to light of textile materials.

Procedure
 Samples of the textile material to be tested and the agreed upon comparison standard(s) are exposed simultaneously to a light source under specified conditions. The colorfastness to light of the specimen is evaluated by comparison of the color change of the exposed portion to the masked or control portion of the test specimen using the AATCC Gray Scale for Color Change or by instrumental color measurement.

| Test Specimen Identification | Number of Cycles | Rating |
|------------------------------|------------------|--------|
| See Above | 2 (40 AFT/h) | 5 |
| | | |
| | | |
| | | |

| Key to Ratings | |
|----------------|-------------------------|
| 5 | Negligible or no change |
| 4 | Slight change |
| 3 | Noticeable change |
| 2 | Considerable change |
| 1 | Severe change |

President L. Scott Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others is the act of the reader of Independent Textile Testing Service, Inc. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

测试文件
65

Test No: 124277

Independent Textile Testing Service, Inc.
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3613 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:
 Subject: Sample(s) of carpet submitted for testing by the customer and identified below:
 Sample Identification: Green Tiles

Test Method Conducted
 AATCC Test Method 175-2003
 Stain Resistance: Pile Floor Coverings

Purpose and Scope
 This test method is intended for use on pile floor coverings to determine the resistance to staining by acid food colors.

Procedure
 A specimen of pile floor covering is stained with a small volume of a diluted aqueous solution of Food Drug & Cosmetic (FD&C) Red 40 adjusted to an acid pH. After allowing the stained specimen to remain at controlled conditions for 24 ± 4 hours, it is rinsed in water to remove all unused FD&C Red 40 dye. Any residual stain is assessed after drying.

Test Sample Rating: 9

| Table 1. Rating Scale | |
|-----------------------|-----------------------|
| Grade Number | Definition |
| 10 | No residual stain |
| 1 | Severe residual stain |

President L. Scott Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others is the act of the reader of Independent Textile Testing Service, Inc. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

测试文件
66

ASTM E648 Bodenbelagsstrahlplatten-Test & ASTM D 2859 Flammbarkeitstest

阻燃检验报告ASTM E648

Independent of Textile
Testings
Service, Inc.
PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@italab.com

Test Number: 124277

Test Report

Customer:
Subject: Specimens of the submitted sample were prepared and tested in accordance with ASTM E 648-08 and/or Federal Test Method 372, NFPA 253

FLOORING RADIANT PANEL TEST

Sample Description
Green Tiles

Test Assembly
Mounted on 6mm FRC Board
(Using Premium Multi-Purpose Adhesive)

| Test Results | Specimen No. 1 | Specimen No. 2 | Specimen No. 3 |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Critical Radiant Flux | 0.51 watts/cm ² | 0.65 watts/cm ² | 0.67 watts/cm ² |
| Total Burn Length | 39.0 cm | 32.0 cm | 31.0 cm |
| Flame Front Out | 56.0 minutes | 26.0 minutes | 45.0 minutes |

Average Critical Radiant Flux 0.61 watts/cm²
Estimated Standard Deviation 0.09 watts/cm²
14.3% coefficient of variation


President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other or the use of the name of Independent Textile Testing Service, Inc., must obtain our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

阻燃检验报告ASTM D 2859

Independent of Textile
Testings
Service, Inc.
PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@italab.com

Test Number: 124277

Test Report

Customer:
Subject: "Consumer Product Safety Commission (CPSC) FF 1-70"
"16 CFR 1630"
"ASTM D 2859-04"
"Consumer Product Safety Improvement Act"
Scope: This test method covers the determination of the flammability of finished textile floor covering materials when exposed to an ignition source under controlled laboratory conditions. It is applicable to all types of textile floor coverings regardless of the method of fabrication or whether they are made from natural or man-made fibers.

FLAMMABILITY TEST REPORT

| STYLE | COLOR | ROLL | TESTED | PASSED |
|-------------|-------|------|--------|--------|
| Green Tiles | - | - | 8 | 8 |




President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other or the use of the name of Independent Textile Testing Service, Inc., must obtain our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

ASTM E662 (1) Rauchdichtetest

烟密度检验报告ASTM E662 (1)

Independent Textile Testing Service, Inc. Test Number: 124277
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@ittstlab.com

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance: 2.5 watts/cm² G Factor 132
 Thermal Exposure: Flaming
 Furnace Voltage: 100
 Burner Fuel: Propane

Sample Description

Green Tiles

Test Results

| | #1 | #2 | #3 | Average |
|--|--|------|-------|---------|
| Chamber Temperature, °F (start) | 95 | 95 | 95 | |
| Chamber Pressure | Maintained positive, under 3" H ₂ O | | | |
| Minimum Transmittance (TM), % at, minutes | 88% | 84% | 92% | |
| | 9.40 | 9.73 | 10.13 | 9.75 |
| Maximum Specific Optical Density (DM) Clear Beam, (DC) | 139 | 142 | 137 | 139 |
| | 14 | 20 | 16 | 17 |
| DM, CORRECTED (DMC) | 125 | 122 | 121 | 123 |
| Specific Optical Density at 1.5 minutes | 16 | 26 | 23 | 22 |
| Specific Optical Density at 4.0 minutes | 89 | 105 | 87 | 94 |
| Time to 90% DM, minutes | 6.90 | 6.55 | 7.17 | 6.87 |
| Time to DS = 16, minutes | 1.55 | 1.35 | 1.30 | 1.40 |


 President L. Kent Sudoth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

烟密度检验报告ASTM E662 (2)

Independent Textile Testing Service, Inc. Test Number: 124277
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@ittstlab.com

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance: 2.5 watts/cm² G Factor 132
 Thermal Exposure: Non-flaming
 Furnace Voltage: 100
 Burner Fuel: --

Sample Description

Green Tiles

Test Results

| | #1 | #2 | #3 | Average |
|--|--|-------|-------|---------|
| Chamber Temperature, °F (start) | 95 | 95 | 95 | |
| Chamber Pressure | Maintained positive, under 3" H ₂ O | | | |
| Minimum Transmittance (TM), % at, minutes | 18% | 52% | 30% | |
| | 12.30 | 13.03 | 12.13 | 12.49 |
| Maximum Specific Optical Density (DM) Clear Beam, (DC) | 494 | 433 | 465 | 464 |
| | 2 | 2 | 2 | 2 |
| DM, CORRECTED (DMC) | 492 | 431 | 463 | 462 |
| | 1 | 1 | 1 | 1 |
| Specific Optical Density at 1.5 minutes | 43 | 38 | 46 | 42 |
| Specific Optical Density at 4.0 minutes | 8.77 | 9.30 | 9.08 | 9.05 |
| Time to 90% DM, minutes | 3.28 | 3.40 | 3.27 | 3.32 |
| Time to DS = 16, minutes | | | | |


 President L. Kent Sudoth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

Test: ASTM D 1335 Büschelbindung aus Pile-Bodenbelägen & AACHEN ITTS 004
 Dimensionsstabilität

内在与外在质量检验报告ASTM D 1335

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722
 Phone: 706-275-3613 • Fax: 706-273-7057 • E-mail: info@intslab.com

Test Report

Customer:

Subject: Sample(s) submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
 ASTM D 1335 Tuft Bind of Pile Floor Coverings

Scope:

This test method covers the determination of the force required to pull a tuft completely out of a cut pile floor covering or to pull one or both legs of a loop free from the backing of looped pile floor coverings.

Test Results

| | | |
|---------|----------|----------|
| 1) 8.5 | 6) 7.2 | 11) 9.5 |
| 2) 10.8 | 7) 10.8 | 12) 9.5 |
| 3) 7.9 | 8) 5.9 | 13) 8.9 |
| 4) 8.2 | 9) 9.4 | 14) 6.2 |
| 5) 10.4 | 10) 10.5 | 15) 11.0 |

Average Tuft Bind: 9.0 lbs.

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, and their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of assembly, chemical or similar products. The reports and notes are the property of Independent Textile Testing Service, Inc., and are not to be used under any circumstances in advertising to the general public.

尺寸稳定性检验报告AACHEN ITTS 004

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722
 Phone: 706-275-3613 • Fax: 706-273-7057 • E-mail: info@intslab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
 ITTS 004
 AACHEN Dimensional Stability

Purpose and Scope

This test procedure measures the dimensional stability of textile floor coverings both modular and broadloom when subjected to varied moisture, heat and dry conditions.

| Test Condition | Measurement | Percent Change |
|-----------------|-------------|----------------|
| M ₀ | 19.6750 | |
| MT ₁ | 19.6688 | -0.032 |
| MT ₂ | 19.6763 | +0.006 |
| MT ₃ | 19.6638 | -0.057 |
| MT ₄ | 19.6668 | -0.032 |
| | | -0.0062" |

Test Condition Key

M₀ Machine Direction Original Measurement
 C₀ Cross Direction Original Measurement
 T₁ Two (2) hours in an oven at 60° C
 T₂ Two (2) hours in a 1% solution at 20° C
 T₃ Twenty-four (24) hours in an oven at 60° C
 T₄ Forty-eight (48) hours in standard climate at 21° C & 65% RH

| Test Condition | Measurement | Percent Change |
|-----------------|-------------|----------------|
| C ₀ | 19.6925 | |
| CT ₁ | 19.6888 | -0.019 |
| CT ₂ | 19.6925 | 0.000 |
| CT ₃ | 19.6850 | -0.038 |
| CT ₄ | 19.6913 | -0.006 |
| | | -0.0012" |

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, and their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of assembly, chemical or similar products. The reports and notes are the property of Independent Textile Testing Service, Inc., and are not to be used under any circumstances in advertising to the general public.

Call
 (86) 755 82132292

Or

Enquiry Now
 for more style