Instrucción personalizada

& gt; Largo Perdurable Chorro de
tinta Impresión Logo en el Nylon Fibra con Antideslizante Natural Caucho Apoyo.
& gt; No Limitación en Diseños, Colores &erio; Tamaño.
& gt; Perfecto Camino a Promover Tu Empresa Imagen.
& gt; UN Piso Mats con un Eye-
Catching Diseño ese poder Mejorar Marca y Márketing Esfuerzos.
& gt; Ambos para Interior &erio; Al aire libre Ubicaciones

Tienes 4 opciones sobre las pilas de nylon:

& gt; Ít# DK-2450: respaldo de goma de Nylon + 2mm / 2000gsm de 3mm / 450gsm
Competitivo Precio, Inferior Pila Altura, Mejor Elección para Complicado Diseños

& gt; Ít# DK-2000: 4mm /600gsm Nylon + 2Soporte de goma mm / 2000gsm
Más Popular Artículos, Inferior Giro Pila, Mejor Vender para NOS Mercado

& gt; Ít# DK-2200: 5mm /700gsm Nylon + 2Soporte de goma mm / 2000gsm Mayor Giro Pila, Más pesado Deber ít. para Elección

& gt; Ít# DK-2300: 7mm / 950gsm Nylon + 2Soporte de goma mm / 2000gsm Objetos lujosos, Suave Gruesa pila, también el precio es más alto también

Tres respaldos para la elección:

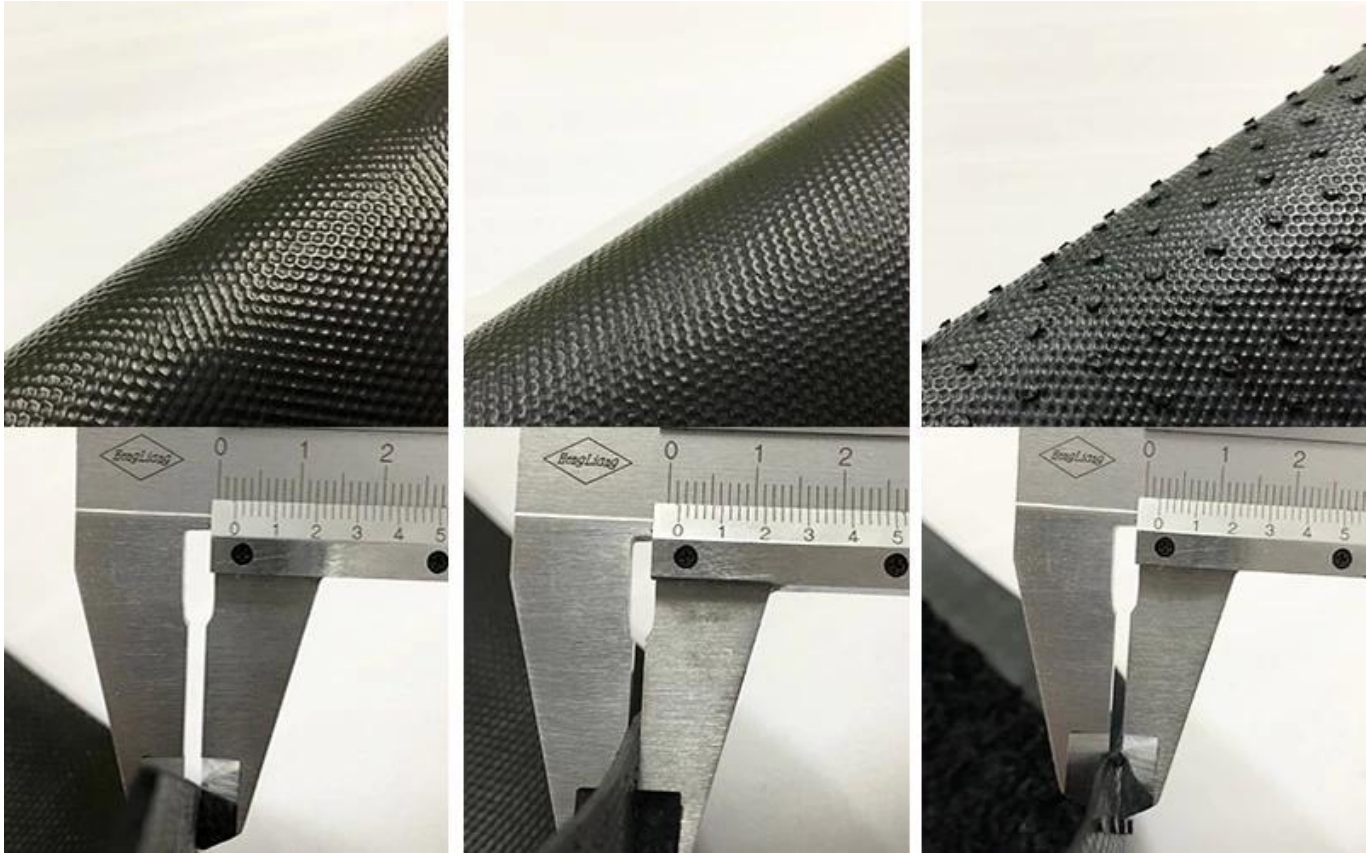

Tamaños para elegir:

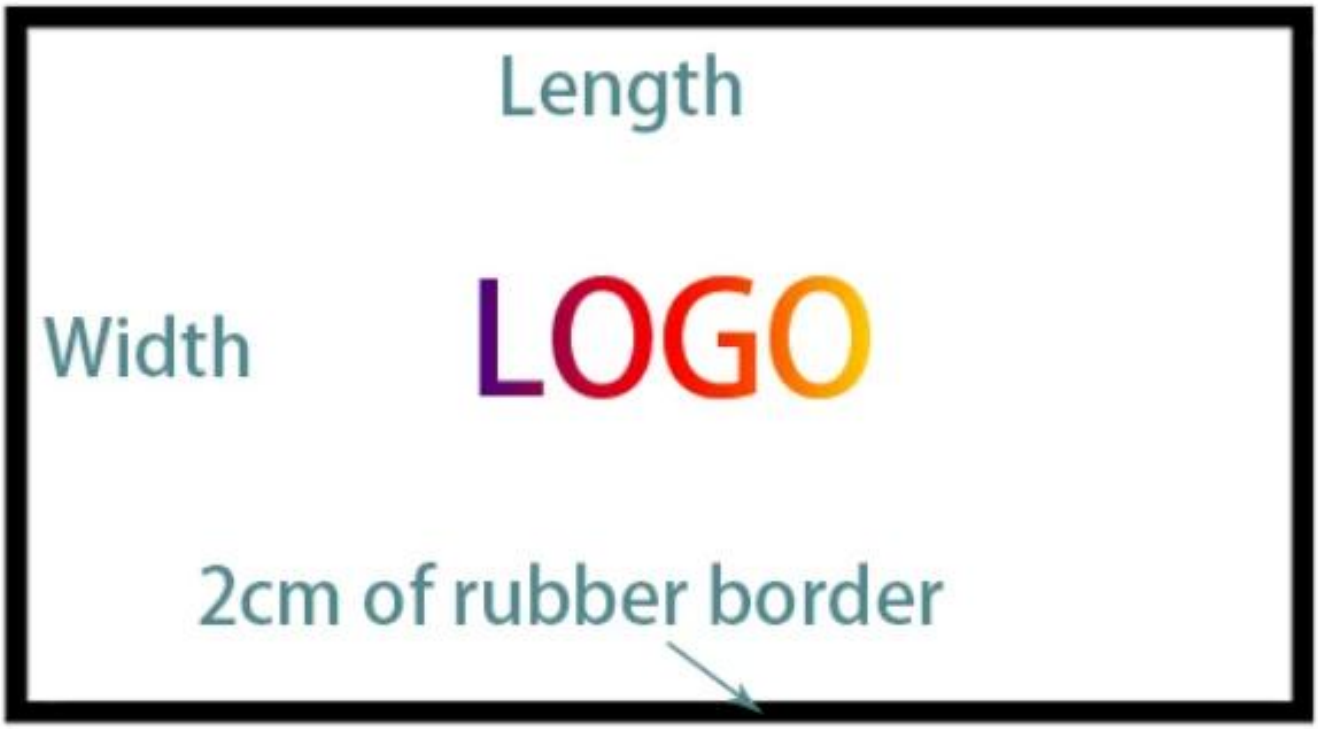

El ancho máximo: 2m
La longitud máxima: sin límite
Tamaños populares: 40x60cm, 46x74cm, 50x70cm, 50x80cm, 60x90cm, 80x120cm, 120x180cm, Tamaños personalizados disponibles.

Puedes elegir cualquier color:

Cómo limpiar las esteras:

[illegible] 2. Vacuum Clean 3. Manguera Off Ccleaning 4. No lavar a máquina por favor.

¿Cómo producimos las esteras?

¿Nuestras esteras son seguras? ¡Por supuesto!

SGS

TEST REPORT

No. : SZML1310004540
Date : Oct. 16, 2013
Page: 1 of 2

SHENZHEN DOTCOM HOUSEWARE PRODUCTS CO., LTD
RM 501-505, HUANG MAO HANDRY ELECTRICAL BLDG, 4TH BAOJUN RD, SHENZHEN, CHINA 518029

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Name	NYLON PRINTED MAT WITH RUBBER BACKING
SGS Ref No.	GZMR1310 0008
Material	NYLON+RUBBER
Spec	50×80CM
Manufacturer	SHENZHEN DOTCOM HOUSEWARE PRODUCTS CO., LTD
Test Performed	Selected test(s) as requested by applicant
Date of Receipt	Oct. 11, 2013
Test Period	Oct. 11, 2013 to Oct. 18, 2013

Test result(s) : Please refer to the following page(s)

*******To be continued*******

Signed for and on behalf of
SGS-CSTC Ltd.

Zander

Zander Li
Authorized Signatory

SGS

TEST REPORT

No. : SZML1310004540
Date : Oct. 16, 2013
Page: 2 of 2

Test Information:

Sample description: See photo

Lab environment condition: 23±2℃, 50±5%Rh

No.	Test item	Test method	Test condition	Test result
1	Water absorption	ASTM D1240-02 (2008)[2] Procedure A	Specimen:50×50×6mm Immersion condition: 23±2℃, 24h	0.000g/cm[2] (See note 1)

Note: 1. Water absorption, g/cm[2] = (Final mass - initial mass) / initial dry volume

2. All test specimens were cut from the sample.

3. The above test was carried out by a SGS laboratory.

Photo:

End of report

Intertek

Test Report

Number: G2HT00870233

Tests Conducted (As Requested By The Applicant)

1 Color Fastness To Washing (AATCC 61-2010, Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 0.15% AATCC WOB Detergent Solution With 50 Steel Balls):

Color Change	4
Color Staining	
-Acetate	4.5
-Cotton	4
-Nylon	4.5
-Polyester	4.5
-Acrylic	4.5
-Wool	4.5

2 Color Fastness To Crocking (AATCC 8-2007):

Dry	4.5
Wet	4.5

3 Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp):

20 Hours Exposure
Grade 4

SP / Ngwejou

Page 3 Of 4

Intertek Testing Services (Guangzhou) Ltd.
3/F, Hengyun Building, 235 Kaifa Ave., Guangzhou
Economic & Technological Development District,Guangzhou,China
Tel: (86)20-8366 6888 Fax: (86)20-8222 8104 PostCode:510730

Intertek

Test Report

Number: G2HT00870233

Tests Conducted (As Requested By The Applicant)

4 Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631):

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-70).

Requirement:
(1) Test Criterion:
The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flattening Frame At Any Point.
(2) Acceptance Criterion:
At Least 7 Of The 8 Specimens Must Meet The Test Criterion For The Material To Be Classified As Resistance To Flammability.

Test Result :

The Nearest Distance From Burnt Area To The Frame Edge

Original (in)	
3.7	3.5
3.6	3.7
3.6	3.8
3.8	3.7

Interpretation Of Test Result :
Number Of Specimens
Meet The Test Criterion 8

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in these terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct.

SP / Ngwejou

Page 4 Of 4

Intertek Testing Services (Guangzhou) Ltd.
3/F, Hengyun Building, 235 Kaifa Ave., Guangzhou
Economic & Technological Development District,Guangzhou,China
Tel: (86)20-8366 6888 Fax: (86)20-8222 8104 PostCode:510730

Nosotros Podría Espectáculo Tú Algunos Mat

s Nosotros hecho:

Cualquier otra pregunta, solo envíenos un correo electrónico o haga una llamada!