

Why Choose Us?











Factory

We've passed BSCI's audits and we are committed to the benefits of society

Certificate

Oeko-Tex Standard 100, IS09001, IS014001 certified, all of our mats are eco-friendly.

Quality

The 1st Chromojet dye-injection carpet printing factory in China

Assurance

Alibaba Trade Assurance to make sure on-time ship & quality safeguard.

UN NEGOCIO CON MUESTRA DE NO ES UNA SENAL DE NO NEGOCIO!


COMO SABEN, MAT LOGO ES GRANDE IDEAL PARA PROMOVER LA IMAGEN DE LA EMPRESA, SE PUEDE COMBINAR LA BENEFICIOS DE UNA ALFOMBRA CON UN DISEÑO LLAMATIVO QUE PUEDEN MEJORAR LOS ESFUERZOS DE DESARROLLO Y COMERCIALIZACIÓN.

SHENZHEN DOTCOM PRODUCTOS PARA EL HOGAR PRODUCTOS CO., LTD. ES UNO DE LOS FABRICANTES PROFESIONALES Y EXPORTADORES DE ALFOMBRAS DE PISO LOGOTIPO CON EXPERIENCIA DE MÁS DE DIEZ AÑOS 'EN ESTA LÍNEA. PODEMOS AYUDARLE A ENCONTRAR EL MEJOR TIPO DE ALFOMBRA DE LOGOTIPO BASADO EN LA COMPLEJIDAD DE SU DISEÑO Y SU FUNCIÓN PREVISTA, NUESTRA ESTERILLA LOGOTIPO ABARCA UNA AMPLIA GAMA DE TIPOS, INCLUYENDO NYLON ESTERA LOGOTIPO, ESTERA LOGOTIPO DE ACRÍLICO, LOGOTIPO DE LA ESTERA DE POLIÉSTER, AGUARETENCIÓN ESTERA LOGO, 3D-LOGO COLCHONETA, ETC ...




Our Customers in USA:



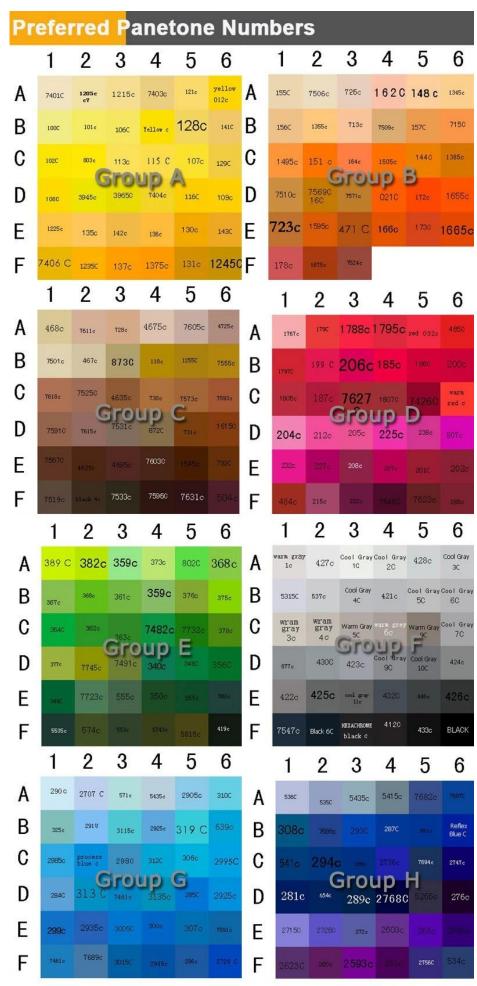

No color limitation, we can do more than above...

Work Flow

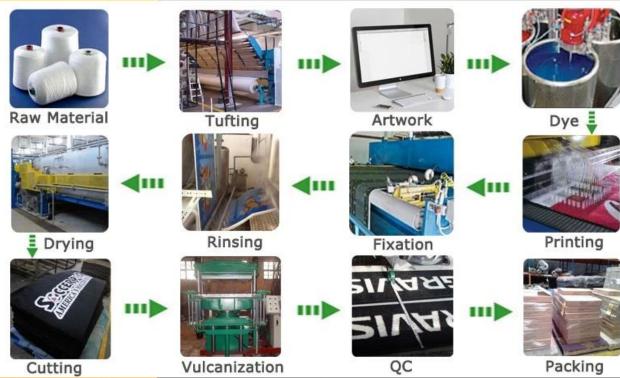

Water Absorption Test





TEST REPORT

No. : SZML131004540 Date : Oct. 16, 2013 Page: 2 of 2

Test Information: Sample description: See photo

Lab environment condition: 23±2°C, 50±5%RH

No.	Test item	Test method	Test condition	Test result
1	Water absorption	ASTM C1016-02 (2008) ¹¹ Procedure A	Specimen:300+50+4.6mm Immersion condition: 23±2°C, 24h	0.695g/cm ² (See note 1)
Note: 1.	Water absorption, gicrn ²	* (Final mase-initial mass)	/ Initial dry volume	

3. The above test was carried out by a SGS laboratory



Color Fastness & Flammability Test Intertek Intertek Test Report Test Report GZHT00870233 Tests Conducted (As Requested By The Applicant) Tests Conducted (As Requested By The Applicant) Color Fastness To Washing (AATCC 61-2010, Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 0.15% AATCC WOB Detergent Solution With 50 Steel Balls): Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631):

Color Fastness To Crocking (AATCC 8-2007): Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp):

Number: G2HT00870233 The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-70). The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flattening Acceptance Criterion: At Least 7 Of The 8 Specimens Must Meet The Test Criterion For The Material To Be Classified As The Nearest Distance From Burnt Area To The Frame Edge

Interpretation Of Test Result : Number Of Specimens Meet The Test Criterion

This report is made solely on the basis of your indirections and/or information recommendation for any particular current of action, fathered does not accept the Climin in respect of this report and only accepts faithing to the Client interfects provision of services to you, freezed makes no warrantee or regre-sion provided for the terms and confidence, We have served to conduct the approvised for many loss energies of or in connection with this report, as gross neighbors or whild misconduct.

Page 3 Of 4

Interlek Testing Services (Guangzhou) Ltd. 3/F. Hengyun Building, 235 Kalfa Ave. Guangzhou ine & Technological Development District Guangzhou, China 光年(广州) 技术服务 作院会司 中国广州的委托大学及大学大学、企业会会 820/8396 6868 Fax: (8620/8222 8169 PostCode:510730

Page 4 Of 4

1.Color Difference Due to process of printing onto a fiber surface and the limitation of print machine, the PMS colors and design, can only be matched as close as possible.

3. Service

Online service, solving your problem in 24 hours

Buyers

Guidelines

2.Tolerance

4.Cleaning Recommendation

Shake mat ourside for loose soill; Vacuum cleaner at slow speed with brush will be good to take the deep dry soil.

caracteristicas:

Size tolerance is +/-3%.

Quantity tolerance is +/-5%.

Weight tolerance is +/-5%.

- 1) atraer la atención de la gente, gran ideal para la publicidad.
- 2) La impresión por sublimación, la limitación es su imagen.
- 3) Fácil de limpiar, lavar a máquina.
- 4) zona de alto tráfico, aplicaciones interiores y exteriores.

- 5) 7 días el tiempo de producción.
- 6) No hay requisito de MOQ, puede solicitar 1pc solamente.

Uso ideal:

- 1) Una tienda al por menor
- 2) Punto de Compra Display
- 3) Feria comercial
- 4) Promoción de productos
- 5) los concesionarios de automóviles

Tamaño estándar:

40x60cm, 60x90cm, 83x120cm, 103x150cm, etc ...