



Make Your Own LOGO Mat

Pick the Colors

Measure the Size

Then go ahead >>

Istruzioni personalizzate

& Gt; Lungo durevole a getto d'inchiostro Stampa Logo sopra il Nylon Fibra con Anti scivolo Naturale Gomma da cancellare Backing.

& Gt; No Limitazione sopra Designs, Colori & Amp; Dimensione.

& Gt; Perfezionare Modo a Promuovere Il tuo Azienda Immagine.

&

Gt; UN Pavimento Mats con un Accattivante Design quella può accrescere Branding e Marke ting Gli sforzi.

& Gt; Entrambi per Interno & Amp; All'aperto sedi

Hai 4 scelte riguardo le pile di nylon:

& Gt; Articolo# DK-2450: Nylon 3mm / 450gsm + 2mm / 2000gsm Supporto in gomma

Competitivo Prezzo, Inferiore Mucchio Altezza, Migliore Scelta per Complicato di segni




& Gt; Articolo# DK-2000: 4mm /600 gsm Nylon + 2Supporto in gomma da mm /

2000gsm

Maggior

parte Popolare Elementi, Inferiore twist Mucchio, Migliore Vendere per NOI Mercato

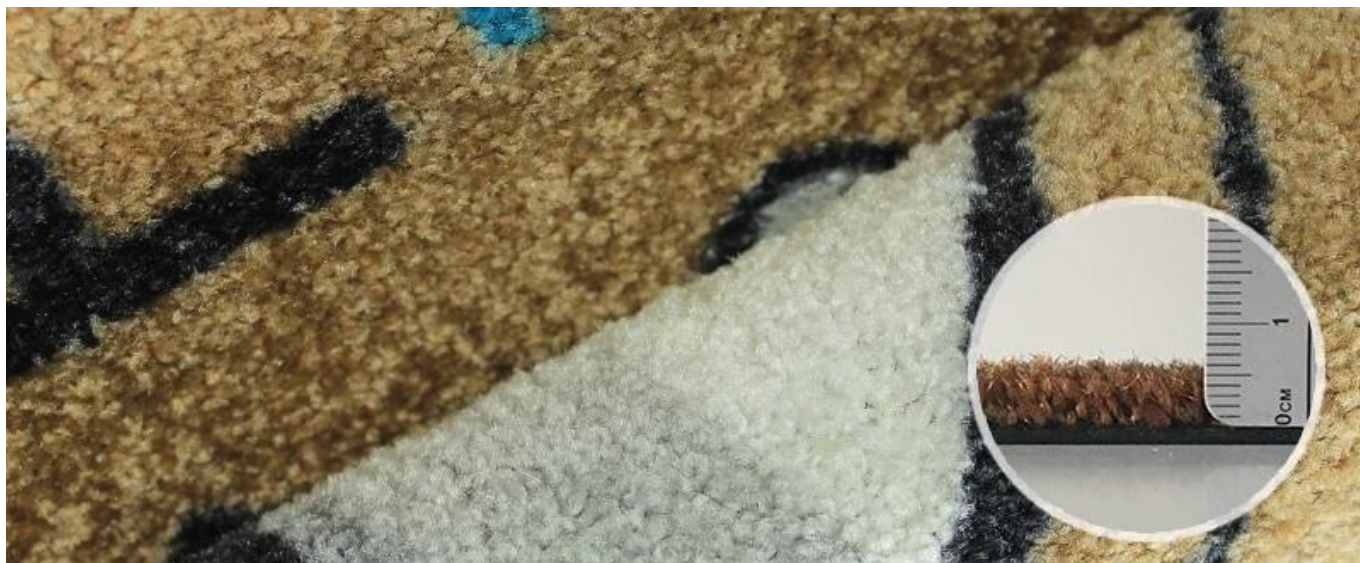

& Gt; Articolo# DK-2200: 5mm /700 gsm Nylon + 2Supporto in gomma da mm / 2000gsm

Più alto twist Mucchio, Più pesante Dovere Articolo per Scelta




& Gt; Articolo# DK-2300: 7mm / 950 gsm Nylon + 2Supporto in gomma da mm / 2000gsm


Oggetti di lusso, morbido Mucchio spesso, anche il prezzo è più alto



Tre supporti per scelta:

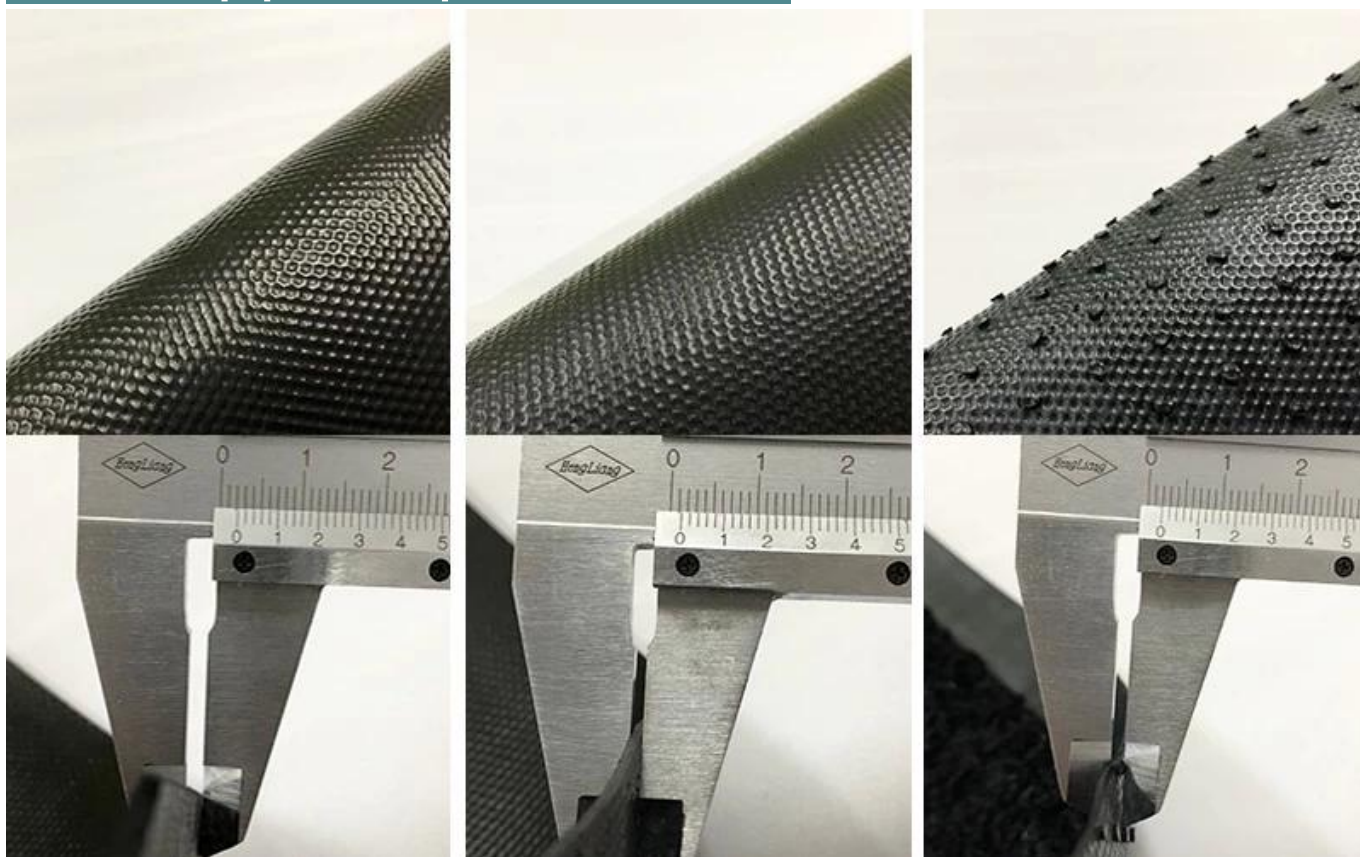

Dimensioni per la scelta:

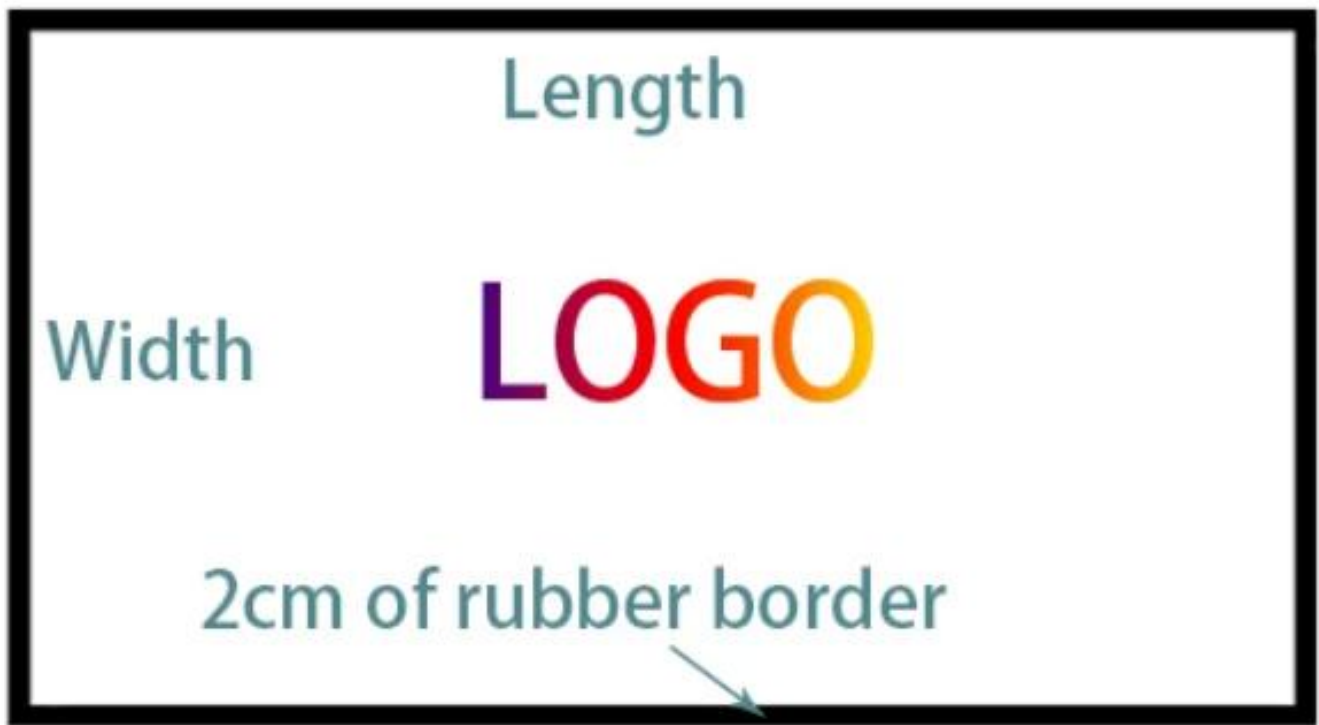

La larghezza massima: 2m

La lunghezza Mmaximal: nessun limite


Dimensioni popolari: 40x60cm, 46x74cm, 50x70cm, 50x80cm, 60x90cm, 80x120cm, 120x180cm, misure personalizzate disponibili.

Puoi scegliere qualsiasi colore:



Come pulire i tappetini:

1. Aspirapolvere 2. Aspirapolvere con tubo flessibile Off Cleaning 3. Aspirapolvere con tubo flessibile Off Cleaning 4. Nessun lavaggio a macchina pls.

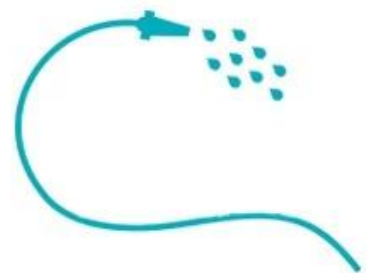

Come produciamo le stuoie?



I nostri tappetini sono sicuri? Sicuro!

SGS TEST REPORT
 No. : S29L121000440
 Date: Oct. 16, 2012
 Page: 1 of 2

SHENZHEN DUTTIUM HOUSEWARE PRODUCTS CO., LTD
 RM 607-608, NINGBO MACHINERY-ELECTRICAL BLDG. #7, BINGQIAO RD, SHENZHEN, CHINA 518029

The following sample(s) were submitted and identified on behalf of the client as:

Sample Name: NYLON PRINTED MAT WITH RUBBER BACKING
 SGT Ref No: Q29M16100000
 Material: NYLON-RUBBER
 Spec: 60x100CM
 Manufacturer: SHENZHEN DUTTIUM HOUSEWARE PRODUCTS CO., LTD
 Test Performed: Selected tests as requested by applicant
 Date of Report: Oct. 11, 2012
 Test Period: Oct. 11, 2012 to Oct. 16, 2012

Test Results: Please refer to the following page(s):
 ~~~~~To be continued~~~~~

Signed for and on behalf of  
 SGT/CPC Lab  
  
 Zamber  
 Senior L  
 Authorized Signatory

SGS 0182255

**SGS TEST REPORT**  
 No. : S29L121000440  
 Date: Oct. 16, 2012  
 Page: 2 of 2

Test Information:  
 Sample description: See photo  
 Lab environment condition: 23±2°C, 50%RH

| No. | Test item        | Test method                         | Test condition                                              | Test result                 |
|-----|------------------|-------------------------------------|-------------------------------------------------------------|-----------------------------|
| 1   | Water absorption | ASTM D 1570-02<br>2005™ Procedure A | Specimen: 200x100x5mm<br>Environment condition: 23±2°C, 50% | 0.000g/cm²<br>(See table 1) |

Note: 1. Water absorption, g/m²; 2. Total water absorption, total dry before testing.  
 3. All test specimens were cut from the upper part.  
 4. The document was controlled by a SGS laboratory.

Photo:

SGS 0182255

3 Color Fastness To Washing (AATCC 61-2011; Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 5-15% AATCC WDB Detergent Solution With 50 Steel Balls)

|                |     |
|----------------|-----|
| Color Change   | 4   |
| Color Staining | 4.5 |
| -Acetate       | 4   |
| -Cotton        | 4.5 |
| -Nylon         | 4.5 |
| -Polyester     | 4.5 |
| -Acrylic       | 4.5 |
| -Wool          | 4.5 |

2 Color Fastness To Crocking (AATCC 8-2007)

|     |     |
|-----|-----|
| Dry | 4.5 |
| Wet | 4.5 |

2 Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp)

|                   |   |
|-------------------|---|
| 20 Hours Exposure | 4 |
| Grade             | 4 |

4 Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631)

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-72).

**Requirements**

- (1) Test Criteria:  
The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flammability Frame At Any Point.
- (2) Acceptance Criteria:  
At Least 7 Of The 8 Specimens Must Meet The Test Criteria For The Material To Be Classified As Resistance To Flammability.

**Test Result :**

The Nearest Distance From Burnt Area To The Frame Edge

|          |     |     |
|----------|-----|-----|
| Original | 3.7 | 3.5 |
| SD1      | 3.6 | 3.7 |
|          | 3.6 | 3.8 |
|          | 3.8 | 3.7 |

**Interpretation Of Test Result :**

|                        |   |
|------------------------|---|
| Number Of Specimens    | 8 |
| Meet The Test Criteria | 8 |

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek also does not accept a duty of care or any other responsibility on any person other than the Client in respect of this report and only accepts liability to the Client insofar as it is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations other than those implied with respect to this report and as provided for in these terms and conditions. We have aimed to conduct the service on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct.

Noi Poteva Mostrare tu Alcuni Mats Noi fatto



Altre domande, inviaci semplicemente un'e-mail o fai una chiamata!