



Istruzioni personalizzate

& Gt; Lungo durevole a getto d'inchiostro Stampa Logo sopra il Nylon Fibra con Anti scivolo Naturale Gomma da cancellare Backing.

& Gt; No Limitazione sopra Designs, Colori & Amp; Dimensione.

& Gt; Perfezionare Modo a Promuovere Il tuo Azienda Immagine.

&

Gt; UN Pavimento Mats con un Accattivante Design quella può accrescere Branding e Marke ting Gli sforzi.

& Gt; Entrambi per Interno & Amp; All'aperto sedi

Hai 4 scelte riguardo le pile di nylon:

& Gt; Articolo# DK-2450: Nylon 3mm / 450gsm + 2mm / 2000gsm Supporto in gomma

Competitivo Prezzo, Inferiore Mucchio Altezza, Migliore Scelta per Complicato di segni



& Gt; Articolo# DK-2000: 4mm /600 gsm Nylon + 2Supporto in gomma da mm /

2000gsm

Maggior

parte Popolare Elementi, Inferiore twist Mucchio, Migliore Vendere per NOI Mercato



& Gt; Articolo# DK-2200: 5mm / 700 gsm Nylon + 2Supporto in gomma da mm / 2000gsm

Più alto twist Mucchio, Più pesante Dovere Articolo per Scelta




& Gt; Articolo# DK-2300: 7mm / 950 gsm Nylon + 2Supporto in gomma da mm / 2000gsm


Oggetti di lusso, morbido Mucchio spesso, anche il prezzo è più alto



Tre supporti per scelta:

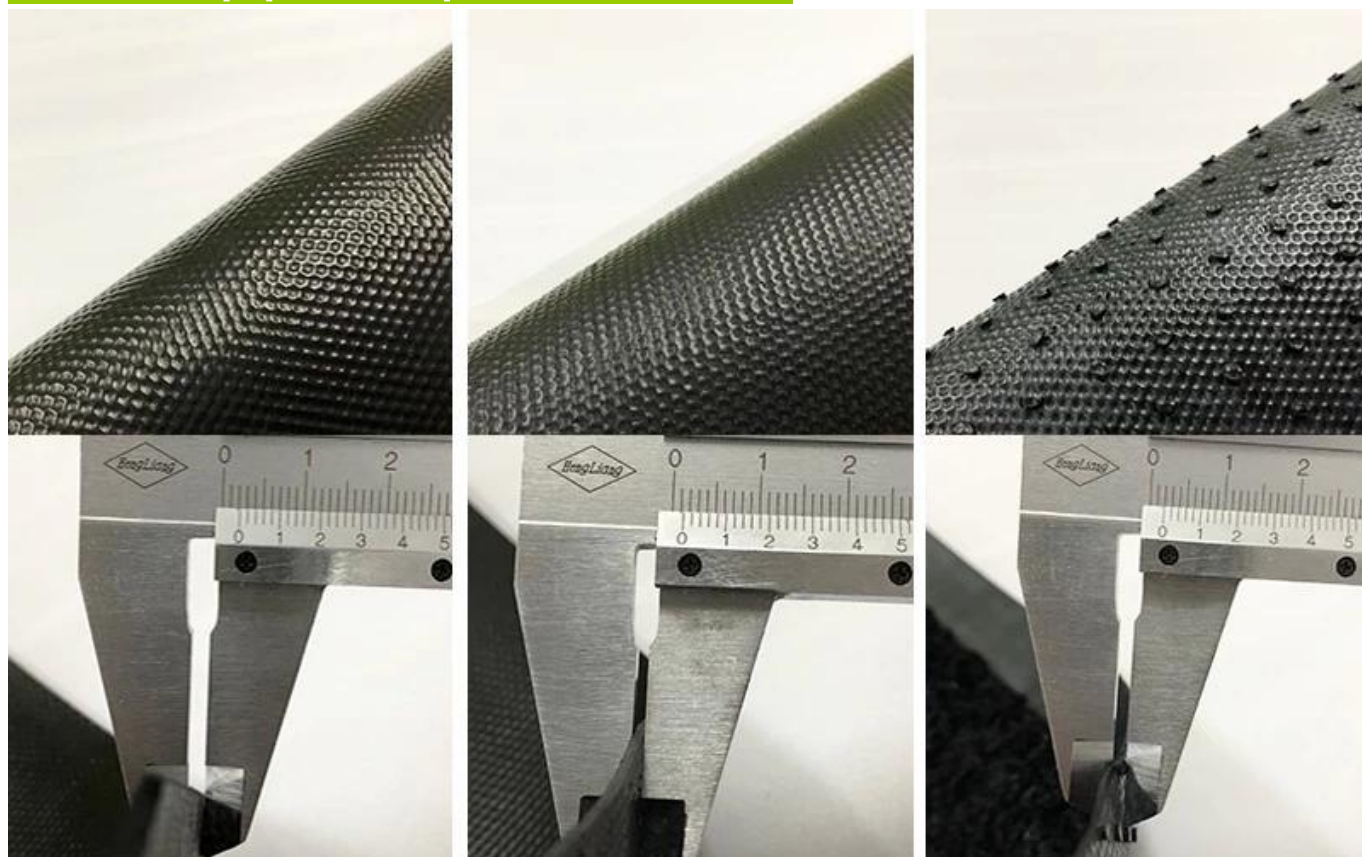

Dimensioni per la scelta:

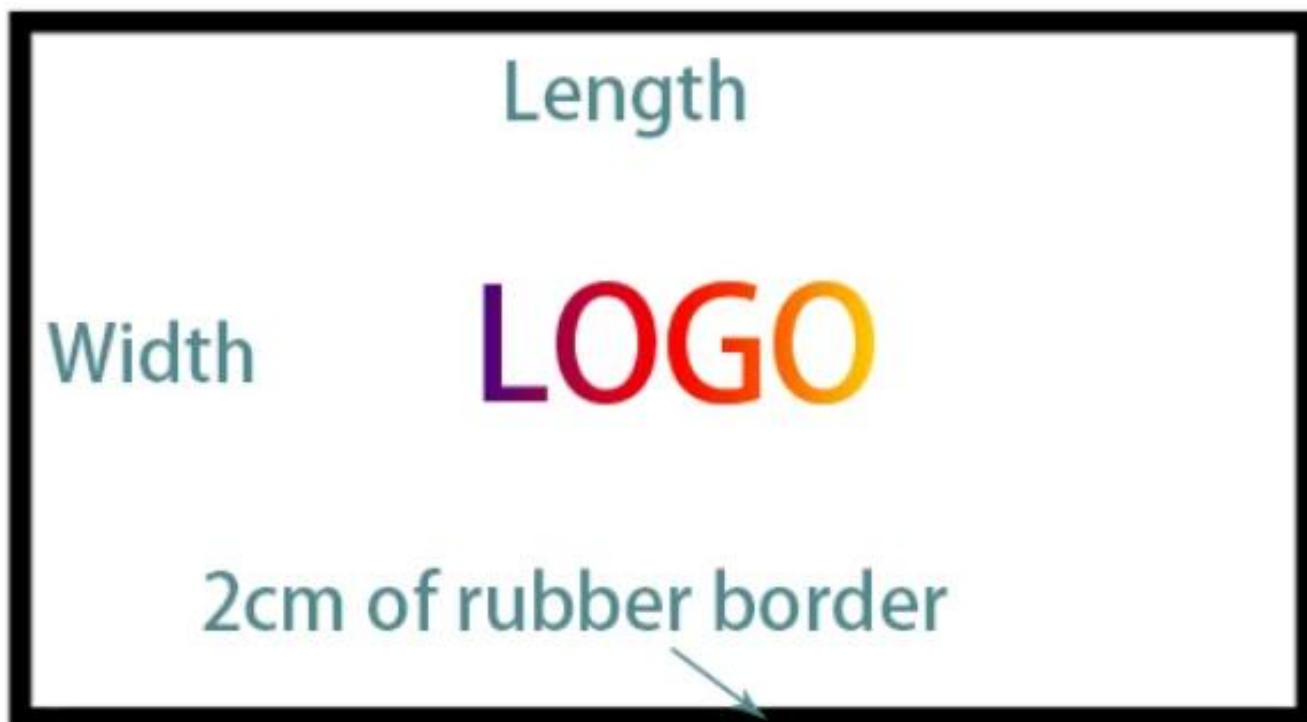

La larghezza massima: 2m

La lunghezza Mmaximal: nessun limite

Dimensioni popolari: 40x60cm, 46x74cm, 50x70cm, 50x80cm, 60x90cm, 80x120cm, 120x180cm, misure personalizzate disponibili.

Puoi scegliere qualsiasi colore:



Come pulire i tappetini:

1. Aspirapolvere 2. Aspirapolvere 3. tubo flessibile Off Ccleaning 4. Nessun lavaggio a macchina pls.



Come produciamo le stuoie?



I nostri tappetini sono sicuri? Sicuro!

SGS TEST REPORT

No.: SZWL121004540
Date: Oct. 16, 2012
Page: 1 of 2

SHENZHEN DUTCOM HOUSEWARE PRODUCTS CO., LTD.
RM-027-003, NINGBO MACHINERY ELECTRICAL BLDG. #7, BINGJIA RD, SHENZHEN, CHINA 518029

The following sample(s) were submitted and identified on behalf of the client as:

Sample Name: 100% PRINTED MAT WITH RUBBER BACKING
SGS Ref No.: SZWL121004540
Material: 100% RUBBER
Spec: 100% RUBBER
Manufacturer: SHENZHEN DUTCOM HOUSEWARE PRODUCTS CO., LTD.
Test Performed: Selected testing as requested by applicant
Date of Receipt: Oct. 11, 2012
Test Period: Oct. 11, 2012 to Oct. 16, 2012

Test Results: Please refer to the following page(s):
-----To be continued-----

Signed for and on behalf of:
BOS-CSTC LAB
Zanber
Supplier's Authorized Signatory

SGS TEST REPORT

No.: SZWL121004540
Date: Oct. 16, 2012
Page: 2 of 2

Test Information:
Sample Description: See photo
Lab environment condition: 23±2°C, 50%RH

No.	Test Item	Test Method	Test Condition	Test Result
1	Water absorption	ASTM D 1574-02 2005/11/15/16/17/18/19/20/21/22/23/24/25/26/27/28/29/30/31/32/33/34/35/36/37/38/39/40/41/42/43/44/45/46/47/48/49/50/51/52/53/54/55/56/57/58/59/60/61/62/63/64/65/66/67/68/69/70/71/72/73/74/75/76/77/78/79/80/81/82/83/84/85/86/87/88/89/90/91/92/93/94/95/96/97/98/99/100	Specimen 100% Printed Mat Dimension condition: 23±2°C, 50%RH	0.001g/cm² (See table 1)

Note: 1. Water absorption, g/m². 2. Final water absorption, total dry weight.
3. All test specimens were cut from the sample.
4. The above test was carried out by a SGS laboratory.

Photo:

End of report

Intertek

Test Report

Number:

GZHT00870223

Tests Conducted (As Requested By The Applicant)

1

Color Fastness To Washing (AATCC 61-2013, Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 5-15% AATCC WOB Detergent Solution With 50 Steel Balls)

Color Change

4

Color Staining

4.5

-Acetate

4

-Cotton

4.5

-Nylon

4.5

-Polyester

4.5

-Acrylic

4.5

-Wool

4.5

2

Color Fastness To Crocking (AATCC 8-2007)

Dry

4.5

Wet

4.5

3

Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp)

20 Hours Exposure

6

Grade

SP / Page(s)

Page 3 Of 4

Intertek Testing Services (Guangzhou) Ltd

3/F, Hongyun Building, 235 Kaili Ave., Guangzhou

Economic & Technological Development District, Guangzhou, China

中国广东省广州市经济技术开发区

300000 中国广东省广州市经济技术开发区

Tel: (86)20-8200-8888 Fax: (86)20-8200-8168 Email: Intertek@intertek.com

Intertek

Test Report

Number:

GZHT00870223

Tests Conducted (As Requested By The Applicant)

4

Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631)

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-72).

Requirements

(1) Test Criteria:

The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flattening Frame At Any Point.

(2) Acceptance Criteria:

At Least 7 Of The 8 Specimens Must Meet The Test Criterion For The Material To Be Classified As Resistance To Flammability.

Test Result :

The Nearest Distance From Burnt Area To The Frame Edge

Original

0.0

3.7 3.5

3.6 3.7

3.6 3.8

3.8 3.7

Interpretation Of Test Result :

Number Of Specimens

8

Met The Test Criterion

SP / Page(s)

Page 4 Of 4

Intertek Testing Services (Guangzhou) Ltd

3/F, Hongyun Building, 235 Kaili Ave., Guangzhou

Economic & Technological Development District, Guangzhou, China

中国广东省广州市经济技术开发区

300000 中国广东省广州市经济技术开发区

Tel: (86)20-8200-8888 Fax: (86)20-8200-8168 Email: Intertek@intertek.com

Noi Poteva Mostrare tu Alcuni Mats Noi fatto



Altre domande, inviaci semplicemente un'e-mail o fai una chiamata!