

00, 00 000 00 0 000000. 000, 000000 00 00 00 0000 0000 0 000 00 0 0 0000.

00 000 00000 0000 0000 0000 0000 000 00 00 000 000000. 00, 0000 000 00 0000 0000 0000 00 0 0000 00 000000 000 00000 0 0000 00 000000 00 00 0000 00 0000 0 0000 00.

Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#1: Nylon Pile

Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Nylon Loop pile can absorb water effectively

Pattern#1: Non-woven Backing with Dot

Non-woven with dots makes mats more anti-slip



Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- Non-woven backing covered with dots to avoid slidign
- Stylish and muple designs for your option




Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#2: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"

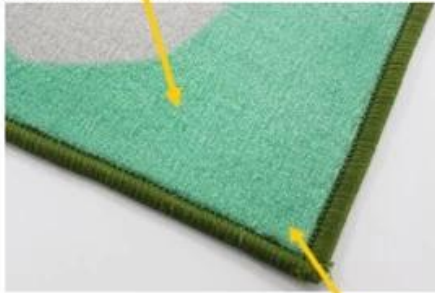

Nylon Loop pile can absorb water effectively

Pattern#2: Latex Backing

Latex Backing makes mats more anti-slip

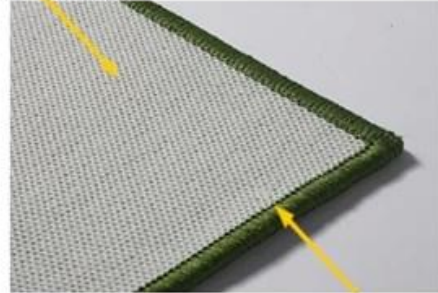

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- Latex backing to avoid slidign
- Stylish and mutiple designs for your option



Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#3: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Nylon Loop pile can absorb water effectively

Pattern#3: TPR Backing

TPR Backing makes mats more anti-slip

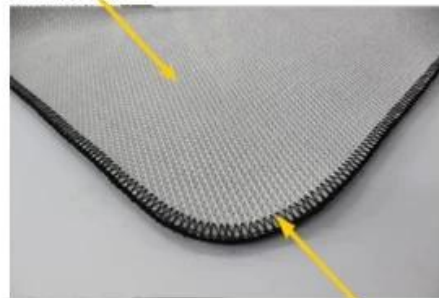

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- TPR backing to avoid slidign
- Stylish and mutiple designs for your option



Certification:

ITTC
No. 390 Gongwen Road, Fengxian District Shanghai, China 201413
Tel: (86-21) 5753 4800 Fax: (86-21) 5753 4819

Test Report No. 26796010

Client Information:
Supplier No. 26000
Client Company Name: [Redacted]
Contact Address: No. 110, Gongwen Road, Shanghai, Shanghai
Client Contact Person: Li Changmei
WEA Contact Person: Kenneth
Sample Receive Date/Test Start Date: 25/09/13

Sample Information by applicant:
Article No. 802407089240709
Article Name: Bagging
Article Date Stamp: 1311
Material Producer: [Redacted]
Material Description: [Redacted]
Material Batch Number/Production Date: [Redacted]
Test type: Production Test
Sample Class: Blue

Test Method:
Formaldehyde content in textile, ISO 14184-1
pH value in textile, ISO 3071

Test Results:

Formaldehyde content (mg/kg)		WEA Limit
Mean value	Not detectable	1
No.	1	2
Individual value	Not detectable	Not detectable

Remarks:
• Value below 10 ppm is reported as 'Not detectable'.
• The standard curve is performed 2008-2-20/2008.
• The concentration of formaldehyde stock solution is certified by Hach-Lange.

Determination Of pH Of Aqueous Extract (Refer To ISO 14184-1, ISO 3071-4, ISO 3071-5, ISO 3071-6, ISO 3071-7, ISO 3071-8, ISO 3071-9, ISO 3071-10, ISO 3071-11, ISO 3071-12, ISO 3071-13, ISO 3071-14, ISO 3071-15, ISO 3071-16, ISO 3071-17, ISO 3071-18, ISO 3071-19, ISO 3071-20, ISO 3071-21, ISO 3071-22, ISO 3071-23, ISO 3071-24, ISO 3071-25, ISO 3071-26, ISO 3071-27, ISO 3071-28, ISO 3071-29, ISO 3071-30, ISO 3071-31, ISO 3071-32, ISO 3071-33, ISO 3071-34, ISO 3071-35, ISO 3071-36, ISO 3071-37, ISO 3071-38, ISO 3071-39, ISO 3071-40, ISO 3071-41, ISO 3071-42, ISO 3071-43, ISO 3071-44, ISO 3071-45, ISO 3071-46, ISO 3071-47, ISO 3071-48, ISO 3071-49, ISO 3071-50, ISO 3071-51, ISO 3071-52, ISO 3071-53, ISO 3071-54, ISO 3071-55, ISO 3071-56, ISO 3071-57, ISO 3071-58, ISO 3071-59, ISO 3071-60, ISO 3071-61, ISO 3071-62, ISO 3071-63, ISO 3071-64, ISO 3071-65, ISO 3071-66, ISO 3071-67, ISO 3071-68, ISO 3071-69, ISO 3071-70, ISO 3071-71, ISO 3071-72, ISO 3071-73, ISO 3071-74, ISO 3071-75, ISO 3071-76, ISO 3071-77, ISO 3071-78, ISO 3071-79, ISO 3071-80, ISO 3071-81, ISO 3071-82, ISO 3071-83, ISO 3071-84, ISO 3071-85, ISO 3071-86, ISO 3071-87, ISO 3071-88, ISO 3071-89, ISO 3071-90, ISO 3071-91, ISO 3071-92, ISO 3071-93, ISO 3071-94, ISO 3071-95, ISO 3071-96, ISO 3071-97, ISO 3071-98, ISO 3071-99, ISO 3071-100)

pH Value		WEA Limit
Mean value	6.5	7

Temperature of extracting solution, t 24
pH of distilled water 6.18

End of Report

Test Report No. 26796010 Page 2 of 2

Formaldehyde content (mg/kg)

Not detectable

1

Not detectable

once a month

