

Nowadays, the drum instrument is more and more popular. However, when the player is on showing, the drum may move and even cause the big noise.

Now we're glad to recommend our drum logo mat to you, which can solve upon problems. Meanwhile, it is also a great idea to promote company's image with your custom design, combining the benefits of a drum floor mat with an eye-catching design that can enhance branding and marketing efforts.

Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#1: Nylon Pile

Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Nylon Loop pile can absorb water effectively

Pattern#1: Non-woven Backing with Dot

Non-woven with dots makes mats more anti-slip



Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- Non-woven backing covered with dots to avoid sliding
- Stylish and multiple designs for your option




Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#2: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"

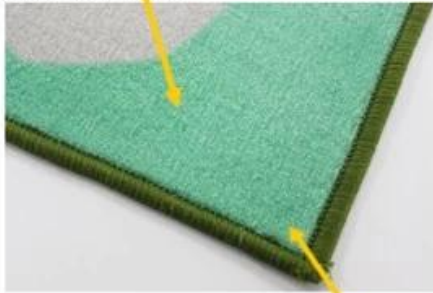

Nylon Loop pile can absorb water effectively

Pattern#2: Latex Backing

Latex Backing makes mats more anti-slip

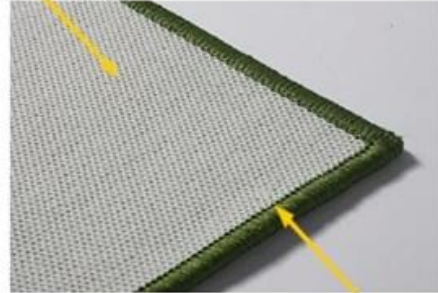

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- Latex backing to avoid slidin
- Stylish and multiple designs for your option



Drum Logo Mat:

A Business with no sign is a sign of No Business!

Pattern#3: Nylon Pile


Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Nylon Loop pile can absorb water effectively

Pattern#3: TPR Backing

TPR Backing makes mats more anti-slip

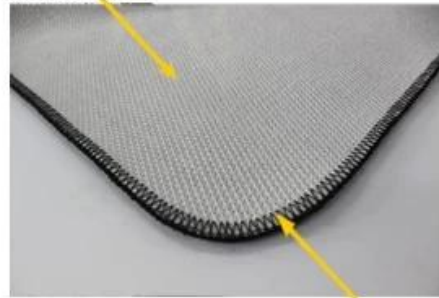

Overlocking can prevent surface peeling off.

- Make more comfortable and safe when playing the drum
- TPR backing to avoid slidin
- Stylish and mutple designs for your option



Certification:

ITTC No.399 Gongwen Road, Fengxian District Shanghai, China 201413
Tel: (86-21) 3753 4800 Fax: (86-21) 3753 4819

Test Report No. 26796210

Client Information:
Supplier No. 0000
Client Company Name
Contact Address
Client Contact Person
WEA Contacts Person
Sample Receive Date/Test Start Date

Sample Information by applicant:
Article No. 8024070892440709
Article Name Bunting
Article Date Stamp 1331
Material Production
Material Description
Material Batch Number/Production Date
Test type Production Test
Sample Class Blue

Test Method:
Formaldehyde content in textile, ISO14184-1
pH value in textile, ISO3071

Test Method:
Formaldehyde content (mg/kg)
Mean value Not detectable WEA Limit /
Individual value 1 Not detectable 2 Not detectable

Determination Of pH Of Aqueous Extract (Refer To ISO 15490:2007, AA-300792-4, ISO-PHG-0032, AA-707372-2, ISO 3071: 2005, extract by distilled water)
pH Value 6.5 WEA Limit /
Temperature of extracting solution, t 24
pH of distilled water 6.18

Remarks:
Value below 10 ppm is reported as 'Not detectable'.
The standard curve is performed once a month.
The concentration of formaldehyde stock solution is certified by Hach-Lange.

End of Report

Test Report No. 26796210 Page 2 of 2

Formaldehyde content (mg/kg)
Not detectable
1
Not detectable
once a month

