

Telhas pretas Fabricantes de Carpetes Comerciais Cinza Berber Square Carpet Tiles


Apresentando uma aparência atraente, praticidade e flexibilidade de instalação, Dotcom Os carpetes fornecem aos clientes um espaço considerável para criatividade. De outras características significativas incluem retardante de fogo, durabilidade, anti estática desempenho, além de tamanho e estabilidade dimensional.

Padrões para Escolha - Série DK-B00:




SPECIFICATION		基本参数	
Description	Carpet Tiles	系列	方格地毯
Raw Material	Woolen	规格型号	208
Structure	1/2" x 1/2" Pile	适用场所	1/2" x 1/2" Pile
Pile Height	5-2.5 mm	厚度	5-2.5 mm
Pile Weight	360 gsm ²	重量	360 gsm ²
Backing	PVC	材质	PVC
Dimensions	50 cm x 50 cm	规格	50 cm x 50 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版权所有。 侵权必究。

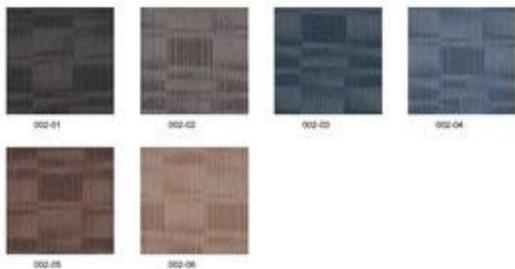


SPECIFICATION		基本参数	
Description	Carpet Tiles	系列	方格地毯
Raw Material	Woolen	规格型号	208
Structure	1/2" x 1/2" Pile	适用场所	1/2" x 1/2" Pile
Pile Height	5-2.5 mm	厚度	5-2.5 mm
Pile Weight	360 gsm ²	重量	360 gsm ²
Backing	PVC	材质	PVC
Dimensions	50 cm x 50 cm	规格	50 cm x 50 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版权所有。 侵权必究。

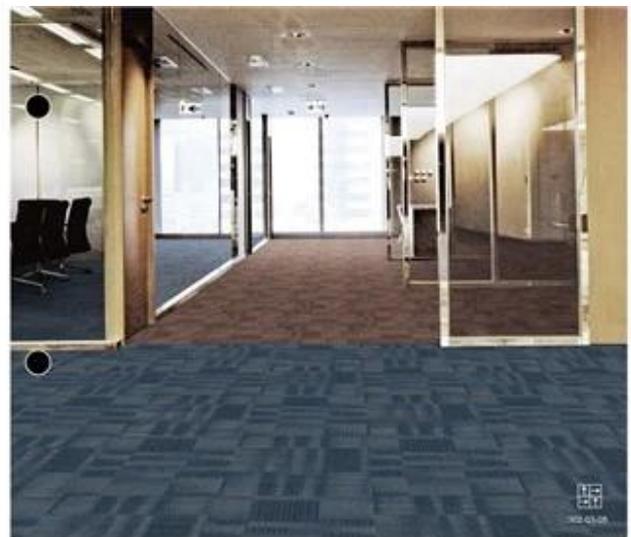



003-01 003-02 003-03 003-04



003-05 003-06

SPECIFICATION		技術參數	
Description	Carpet Tile	品名	方磚地毯
File Material	Nylon	原料名稱	尼龍
Structure	1/4" x 1/4" Pile	鋪設規格	1/4" x 1/4" Pile
Pile Height	5-2.5 mm	高度	5-2.5 mm
Pile Weight	360 g/m ²	重量	360 g/m ²
Backing	PVC	底層	PVC
Dimensions	30 cm x 30 cm	規格	30 cm x 30 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。



003-01-06



004-01 004-02 004-03 004-04



004-05 004-06

SPECIFICATION		技術參數	
Description	Carpet Tile	品名	方磚地毯
File Material	Nylon	原料名稱	尼龍
Structure	1/4" x 1/4" Pile	鋪設規格	1/4" x 1/4" Pile
Pile Height	5-2.5 mm	高度	5-2.5 mm
Pile Weight	360 g/m ²	重量	360 g/m ²
Backing	PVC	底層	PVC
Dimensions	30 cm x 30 cm	規格	30 cm x 30 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。



004-06



005-01 005-02 005-03 005-04



005-05 005-06

SPECIFICATION		技術參數	
Description	Carpet Tile	品名	方磚地毯
File Material	Nylon	原料名稱	尼龍
Structure	1/4" x 1/4" Pile	鋪設規格	1/4" x 1/4" Pile
Pile Height	4-5.2.5 mm	高度	4-5.2.5 mm
Pile Weight	360 g/m ²	重量	360 g/m ²
Backing	PVC	底層	PVC
Dimensions	30 cm x 30 cm	規格	30 cm x 30 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 版權所有，翻印必究。



005-01



SPECIFICATION		技術參數	
Description	Carpet Tile	品名	方格地毯
Tile Material	Nylon	樣式名稱	直條
Structure	1/2" x 1/2" Pile	產品規格	1/2" x 1/2" Pile
Pile Height	4.5 ± 0.5 mm	厚度	4.5 ± 0.5 mm
Pile Weight	350 g/m ²	重量	350 g/m ²
Backing	PVC	底層	PVC
Dimensions	50 cm x 50 cm	規格	50 cm x 50 cm

THE DESIGN OF THIS PRODUCT MAY NOT BE REPRODUCED, COPIED OR SOLD BY ANY OTHER PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED. 圖樣及圖式為本公司所有，未經本公司許可，不得翻印、複製或轉售。保留所有權利。



Método de embalagem:



Teste: AATCC 134 Propensão eletrostática de carpetes & AATCC 165 Colorfastness a Crocking

抗静电检验报告AATCC 134

**Independent Textile
Testing, Inc.**
Service, Inc.
PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test No: 124277

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC 134-1996
Electrostatic Propensity of Carpets

Purpose and Scope

This test method is designed to assess the static generating propensity of carpets developed when a person walks across them by controlled laboratory simulation of conditions which may be met in practice, and more particularly, with respect to those conditions which are known from experience to be strongly contributory to excessive accumulation of static charges.

Test Conditions:
Chamber Temperature: 70° F.
Chamber Relative Humidity: 20%

Test Results:	Sole	Underlay	Maximum Voltage 1 (kV)	Maximum Voltage 2 (kV)	Average (kV)
Test I Step Test	Neolite	Plate	Neg. 0.3	Neg. 0.5	Neg. 0.4
Test II Scuff Test	Neolite	Plate	Neg. 0.2	Neg. 0.3	Neg. 0.3
Test III Step Test	Leather	Plate	Neg. 0.1	--	--
Test IV Scuff Test	Leather	Plate	Pos. 0.2	--	--

Soles:

- a) Neolite XS 664
- b) Suede Leather

Underlayment:

- a) Plate: Earth grounded metal plate
- b) HIJ: Standard 40 oz./yd² rubberized Hair/Lute cushion


President L. Kent Suddeth

Our notes and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our notes and reports apply only to the sample tested and are not necessarily indicative of the quality of any other material or similar products. The reports and notes of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

色牢度检验报告AATCC 165

**Independent Textile
Testing, Inc.**
Service, Inc.
PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test No: 124277

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
AATCC Test Method 165
Colorfastness to Crocking: Carpets

Purpose and Scope

This test method is designed to determine the degree of color transfer from the surface of carpets to other surfaces by rubbing. The intent is to reproduce as nearly as possible true-to-life situations in all constructions whether dyed, printed or otherwise colored.

Procedure

Test procedures employing white test cloths, both dry and wet with water are given.

Test Specimen Identification	Wet Crocking Rating	Dry Crocking Rating
See Above	5	5

Key to Ratings	
5	Negligible or no stain
4	Slight stain
3	Noticeable stain
2	Considerable stain
1	Severe stain


President L. Kent Suddeth

Our notes and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our notes and reports apply only to the sample tested and are not necessarily indicative of the quality of any other material or similar products. The reports and notes of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Teste: AATCC 16E Colorfastness para iluminar & AATCC 175 Resistência a Manchas

耐光色牢度检验报告AATCC 16E

抗污性能检验报告AATCC 175

Test No: 124277

Independent Textile Testing Service, Inc.
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3813 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:
 Subject: Sample(s) of carpet submitted for testing by the customer and identified below:
 Sample Identification: Green Tiles

Test Method Conducted
 AATCC Test Method 16 Option E
 Colorfastness to Light (Water-Cooled Xenon Arc)

Purpose and Scope
 This test method provides the general principles and procedures which are currently in use for determining the colorfastness, to light of textile materials.

Procedure
 Samples of the textile material to be tested and the agreed upon comparison standard(s) are exposed simultaneously to a light source under specified conditions. The colorfastness to light of the specimen is evaluated by comparison of the color change of the exposed portion to the masked or control portion of the test specimen using the AATCC Gray Scale for Color Change or by instrumental color measurement.

Test Specimen Identification	Number of Cycles	Rating
See Above	2 (40 AFT/h)	5

Key to Ratings	
5	Negligible or no change
4	Slight change
3	Noticeable change
2	Considerable change
1	Severe change

President L. Scott Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

测试文件
65

Test No: 124277

Independent Textile Testing Service, Inc.
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3813 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:
 Subject: Sample(s) of carpet submitted for testing by the customer and identified below:
 Sample Identification: Green Tiles

Test Method Conducted
 AATCC Test Method 175-2003
 Stain Resistance: Pile Floor Coverings

Purpose and Scope
 This test method is intended for use on pile floor coverings to determine the resistance to staining by acid food colors.

Procedure
 A specimen of pile floor covering is stained with a small volume of a diluted aqueous solution of Food Drug & Cosmetic (FD&C) Red 40 adjusted to an acid pH. After allowing the stained specimen to remain at controlled conditions for 24 ± 4 hours, it is rinsed in water to remove all unused FD&C Red 40 dye. Any residual stain is assessed after drying.

Test Sample Rating: 9

Table 1. Rating Scale	
Grade Number	Definition
10	No residual stain
1	Severe residual stain

President L. Scott Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

测试文件
66

Teste de Painel Radiante de Pisos ASTM E648 & Teste de Flamabilidade ASTM D 2859

阻燃检验报告ASTM E648

Test Number: 124277

Independent of Textile
Testing
Service, Inc.
PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@italab.com

Customer:
Subject: Specimens of the submitted sample were prepared and tested in accordance with ASTM E 648-05 and/or Federal Test Method 372, NFPA 253

FLOORING RADIANT PANEL TEST

Sample Description
Green Tiles

Test Assembly
Mounted on 6mm FRC Board
(Using Premium Multi-Purpose Adhesive)

Test Results	Specimen No. 1	Specimen No. 2	Specimen No. 3
Critical Radiant Flux	0.51 watts/cm ²	0.65 watts/cm ²	0.67 watts/cm ²
Total Burn Length	39.0 cm	32.0 cm	31.0 cm
Flame Front Out	56.0 minutes	26.0 minutes	45.0 minutes

Average Critical Radiant Flux	0.61 watts/cm ²
Estimated Standard Deviation	0.09 watts/cm ²
	14.3% coefficient of variation


President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other person or the use of the name of Independent Textile Testing Service, Inc., must obtain our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

阻燃检验报告ASTM D 2859

Test Number: 124277


Independent of Textile
Testing
Service, Inc.
PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@italab.com

Customer:
Subject: "Consumer Product Safety Commission (CPSC) FF 1-70"
"16 CFR 1630"
"ASTM D 2859-04"
"Consumer Product Safety Improvement Act"

Scope: This test method covers the determination of the flammability of finished textile floor covering materials when exposed to an ignition source under controlled laboratory conditions. It is applicable to all types of textile floor coverings regardless of the method of fabrication or whether they are made from natural or man-made fibers.

FLAMMABILITY TEST REPORT

STYLE	COLOR	ROLL	TESTED	PASSED
Green Tiles	-	-	8	8




President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other person or the use of the name of Independent Textile Testing Service, Inc., must obtain our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

ASTM E662 (1) Teste de densidade de fumaça

烟密度检验报告ASTM E662 (1)

Independent Textile Testing Service, Inc. Test Number: 124277
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@itttab.com

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance: 2.5 watts/cm² G Factor 132
 Thermal Exposure: Flaming
 Furnace Voltage: 100
 Burner Fuel: Propane

Sample Description

Green Tiles

Test Results

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H ₂ O			
Minimum Transmittance (TM), % at, minutes	88%	84%	92%	
	9.40	9.73	10.13	9.75
Maximum Specific Optical Density (DM) Clear Beam, (DC)	14	20	16	17
DM, CORRECTED (DMC)	125	122	121	123
Specific Optical Density at 1.5 minutes	16	26	23	22
Specific Optical Density at 4.0 minutes	89	105	87	94
Time to 90% DM, minutes	6.90	6.55	7.17	6.87
Time to DS = 16, minutes	1.55	1.35	1.30	1.40


 President L. Kent Sudarth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparatus, material or service provided. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

烟密度检验报告ASTM E662 (2)

Independent Textile Testing Service, Inc. Test Number: 124277
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@itttab.com

Customer:

Subject: Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 258, ASTM E 662-06.

SMOKE DENSITY TEST (NIST)

Operating Conditions

Irradiance: 2.5 watts/cm² G Factor 132
 Thermal Exposure: Non-flaming
 Furnace Voltage: 100
 Burner Fuel: --

Sample Description

Green Tiles

Test Results

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H ₂ O			
Minimum Transmittance (TM), % at, minutes	18%	52%	30%	
	12.30	13.03	12.13	12.49
Maximum Specific Optical Density (DM) Clear Beam, (DC)	494	433	465	464
DM, CORRECTED (DMC)	2	2	2	2
Specific Optical Density at 1.5 minutes	492	431	463	462
Specific Optical Density at 4.0 minutes	1	1	1	1
Time to 90% DM, minutes	43	38	46	42
Time to DS = 16, minutes	8.77	9.30	9.08	9.05
	3.28	3.40	3.27	3.32


 President L. Kent Sudarth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparatus, material or service provided. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

Teste: ASTM D 1335 Tuft Bind de revestimentos de piso de pilha & AACHEN ITTS 004 Estabilidade dimensional

内在与外在质量检验报告ASTM D 1335

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722
 Phone: 706-275-3613 • Fax: 706-273-7057 • E-mail: info@intslab.com
 Test Report

Customer:

Subject: Sample(s) submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
 ASTM D 1335 Tuft Bind of Pile Floor Coverings

Scope:

This test method covers the determination of the force required to pull a tuft completely out of a cut pile floor covering or to pull one or both legs of a loop free from the backing of looped pile floor coverings.

Test Results

1) 8.5	6) 7.2	11) 9.5
2) 10.8	7) 10.8	12) 9.5
3) 7.9	8) 5.9	13) 8.9
4) 8.2	9) 9.4	14) 6.2
5) 10.4	10) 10.5	15) 11.0

Average Tuft Bind: 9.0 lbs.

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, and their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of company, intellectual or other products. The reports and notes are the property of Independent Textile Testing Service, Inc., and are not to be used under any circumstances in advertising to the general public.

尺寸稳定性检验报告AACHEN ITTS 004

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722
 Phone: 706-275-3613 • Fax: 706-273-7057 • E-mail: info@intslab.com
 Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted
 ITTS 004
 AACHEN Dimensional Stability

Purpose and Scope

This test procedure measures the dimensional stability of textile floor coverings both modular and broadloom when subjected to varied moisture, heat and dry conditions.

Test Condition	Measurement	Percent Change
M ₀	19.6750	
MT ₁	19.6688	-0.032
MT ₂	19.6763	+0.006
MT ₃	19.6638	-0.057
MT ₄	19.6668	-0.032
		-0.0062"

Test Condition Key

M₀ Machine Direction Original Measurement
 C₀ Cross Direction Original Measurement
 T₁ Two (2) hours in an oven at 60° C
 T₂ Two (2) hours in a 1% solution at 20° C
 T₃ Twenty-four (24) hours in an oven at 60° C
 T₄ Forty-eight (48) hours in standard climate at 21° C & 65% RH

Test Condition	Measurement	Percent Change
C ₀	19.6925	
CT ₁	19.6888	-0.019
CT ₂	19.6925	0.000
CT ₃	19.6850	-0.038
CT ₄	19.6913	-0.006
		-0.0012"

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, and their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of company, intellectual or other products. The reports and notes are the property of Independent Textile Testing Service, Inc., and are not to be used under any circumstances in advertising to the general public.

Call
 (86) 755 82132292

Or

Enquiry Now
 for more style