



Why Choose Us?



Factory

We've passed BSCI's audits and we are committed to the benefits of society.



Certificate

Oeko-Tex Standard 100, ISO9001, ISO14001 certified, all of our mats are eco-friendly.



Quality

The 1st Chromojet dye-injection carpet printing factory in China



Assurance

Alibaba Trade Assurance to make sure on-time ship & quality safeguard.

БИЗНЕС БЕЗ ЗНАКОВОЙ ЗНАК БЕЗ БИЗНЕСА!

КАК ВЫ ЗНАЕТЕ, LOGO MAT ВЕЛИК ИДЕАЛЬНО ПОДХОДИТ ДЛЯ ПРОДВИЖЕНИЯ ИМИДЖА КОМПАНИИ, ОН МОЖЕТ ОБЪЕДИНИТЬ ВЫГОДЫ ИЗ КОВРИКА С ДИЗАЙНОМ ВЫДЕЛЯЮЩИЙСЯ, КОТОРЫЙ МОЖЕТ ПОВЫСИТЬ БРЕНДИНГА И МАРКЕТИНГОВЫХ УСИЛИЙ. **ШЭНЬЧЖЭНЬ ДОТ HOUSEWARE PRODUCTS CO., LTD.** ЯВЛЯЕТСЯ ОДНИМ ИЗ ПРОФЕССИОНАЛЬНЫХ ПРОИЗВОДИТЕЛЕЙ И ЭКСПОРТЕРОВ ЛОГОТИП КОВРИКИ С ОПЫТОМ БОЛЕЕ ДЕСЯТИ ЛЕТ В ЭТОЙ ЛИНИИ. МЫ МОЖЕМ ПОМОЧЬ ВАМ НАЙТИ ЛУЧШИЙ ТИП ЛОГОТИПА МАТ, ОСНОВАННЫЙ НА СЛОЖНОСТИ ДИЗАЙНА И ЕГО ПРЕДНАЗНАЧЕНИЯ, НАШ ЛОГОТИП МАТ ОХВАТЫВАЕТ ПОЛНЫЙ СПЕКТР ТИПОВ, ВКЛЮЧАЯ НЕЙЛОН ЛОГОТИП МАТ, АКРИЛОВЫЙ МАТ ЛОГОТИП, ПОЛИЭФИРНЫЕ ЛОГОТИП МАТ, ВОДЫ УДЕРЖАНИЯ ЛОГОТИП МАТ , 3D-ЛОГОТИП МАТ, И Т.Д ...

Product Detail:

A Business with no sign is a sign of No Business!

Pattern#1: Nylon Logo Mat

Dyes are permanently injected deep into the nylon pile so that they will not "rub off"



Twisted nylon pile can absorb water effectively

Rubber backing and borders to help the mats stay in place and prevent curling

Pattern#2: HD Logo Mat

Non-woven surface can absorb water effectively



Ruber border helps the wheels move on smoothly

Nitrile rubber backing keep the mat in place



- Combine the benefits of a floor mat with an eye-catching design .
- Enhance brands and market efforts.
- Good water absorption, keep your floor clean and dry.

Pile Options:

DETAILS

1

Item#: DK-2450
Pile Weight: 450g/sqm
Pile Height: 3mm



2

Item#: DK-2000
Pile Weight: 600g/sqm
Pile Height: 4mm



3

Item#: DK-2200
Pile Weight: 700g/sqm
Pile Height: 5mm



4

Item#: DK-2300
Pile Weight: 950g/sqm
Pile Height: 7mm



Back Options:

DETAILS


1

Normal Rubber
Weight: 2,000g/sqm



2

Nitrile Rubber
With cleat
Weight: 1,800g/sqm

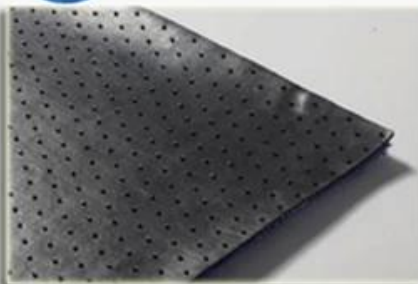

3

TPR
Weight: 900g/sqm



Our Customers in USA:



NFL



NHL



NBA



Hockey



Apparel



Cosmetics



Boots



Electro



Auto



Foodstuff



Bank



Vacuum



Bicycle



Ski



Soccer



Motorcycle

Preferred Pantone Numbers

| | 1 | 2 | 3 | 4 | 5 | 6 | | 1 | 2 | 3 | 4 | 5 | 6 |
|---|--------|-------------|-------|----------|------|----------------|---|-------|--------------|-------|-------|------|-------|
| A | 7401C | 1205c cf | 1215c | 7403c | 121c | yellow 012c | A | 155C | 7506c | 726c | 162C | 148c | 1345c |
| B | 100c | 101c | 106c | Yellow c | 128c | 141c | B | 156C | 1355c | 713c | 7509c | 157C | 715C |
| C | 102c | 803c | 113c | 115 C | 107c | 129c | C | 1495c | 151c | 184c | 1505c | 144C | 1385c |
| D | 108c | 3945c | 3965c | 7404c | 116C | 109c | D | 7510c | 7569C 16C | 7571c | 021C | 172c | 1655c |
| E | 1225c | 135c | 142c | 136c | 130c | 143c | E | 723c | 1595c | 471 C | 166c | 173c | 1665c |
| F | 7406 C | 1235C | 137c | 1375c | 131c | 1245C | F | 178c | 1675c | 7524c | | | |

Group A

Group B

| | 1 | 2 | 3 | 4 | 5 | 6 | | 1 | 2 | 3 | 4 | 5 | 6 |
|---|-------|----------|-------|-------|-------|-------|---|-------|-------|-------|-------|----------|---------------|
| A | 468c | 7611c | 728c | 4675c | 7605c | 4725c | A | 1767c | 179c | 1788c | 1795c | red 032c | 4850 |
| B | 7501c | 467c | 873C | 118c | 1255C | 7555c | B | 1797C | 199 C | 206c | 185c | 186c | 200c |
| C | 7618c | 7525C | 4635c | 730c | 7573c | 7593c | C | 1805c | 187c | 7627 | 1807c | 7426C | warm red c |
| D | 7581C | 7615c | 7531c | 872C | 731c | 1615C | D | 204c | 212c | 205c | 225c | 238c | 807c |
| E | 7567C | 4625c | 4665c | 7603C | 1545c | 732C | E | 232c | 227c | 208c | 207c | 201C | 202c |
| F | 7519c | black 4c | 7533c | 7596C | 7631c | 504c | F | 484c | 215c | 222c | 7545C | 7623c | 188c |

Group C

Group D

| | 1 | 2 | 3 | 4 | 5 | 6 | | 1 | 2 | 3 | 4 | 5 | 6 |
|---|-------|-------|-------|-------|-------|------|---|--------------------|--------------------|-----------------------|-----------------|------------------|-----------------|
| A | 389 C | 382c | 359c | 373c | 802c | 368c | A | warm gray 1c | 427c | Cool Gray 1C | Cool Gray 2C | 428c | Cool Gray 3C |
| B | 367c | 368c | 361c | 359c | 376c | 375c | B | 5315C | 537c | Cool Gray 4C | 421c | Cool Gray 5C | Cool Gray 6C |
| C | 354C | 362c | 363c | 7482c | 7732c | 370c | C | warm gray 3c | warm gray 4c | Warm Gray 5C | warm grey 6c | Warm Gray 9C | Cool Gray 7C |
| D | 377c | 7745c | 7491c | 340c | 348c | 356C | D | 877c | 430C | 423c | Cool Gray 9C | Cool Gray 10C | 424c |
| E | 349c | 7723c | 555c | 350c | 367c | 560c | E | 422c | 425c | cool gray 11c | 432C | 446c | 426c |
| F | 5535c | 574c | 593c | 574c | 5815c | 419c | F | 7547c | Black 6C | HEXACHROME black c | 412C | 433c | BLACK |

Group E

Group F

| | 1 | 2 | 3 | 4 | 5 | 6 | | 1 | 2 | 3 | 4 | 5 | 6 |
|---|-------|-------------------|-------|-------|-------|--------|---|-------|-------|-------|-------|-------|------------------|
| A | 290c | 2707 C | 571c | 5435c | 2905c | 310C | A | 536c | 535c | 5435c | 5415c | 7682c | 7887C |
| B | 325c | 291V | 3115c | 2825c | 319 C | 639c | B | 308c | 7696c | 293C | 287C | 981c | Reflex Blue C |
| C | 2865c | process blue c | 2980c | 312C | 306c | 2995C | C | 541c | 294c | 286c | 2736c | 7694c | 2747c |
| D | 284c | 313 C | 7461c | 3135c | 289C | 2925c | D | 281c | 654c | 289c | 2768C | 5265c | 276c |
| E | 299c | 2935c | 3005C | 300c | 307c | 7681c | E | 2715C | 2726C | 272c | 2603c | 268c | 2605c |
| F | 7461c | 7689c | 3015C | 2945c | 286c | 2728 C | F | 2623C | 260c | 2593c | 261c | 2756c | 534c |

Group G

Group H

No color limitation, we can do more than above...

Work Flow



Raw Material



Tufting



Artwork



Dye



Drying



Rinsing



Fixation



Printing



Cutting



Vulcanization



QC



Packing

Water Absorption Test



TEST REPORT

No. : SZML131004540
Date : Oct. 16, 2013
Page: 1 of 2

SHENZHEN DOTCOM HOUSEWARE PRODUCTS CO., LTD
RM 927-929, XIANKE MACHINERY-ELECTRICAL BLDG. 4TH BAGUA RD, SHENZHEN, CHINA 518029

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Name : NYLON PRINTED MAT WITH RUBBER BACKING
SGS Ref No. : GZMR131016568
Material : NYLON+RUBBER
Spec : 60 x 90CM
Manufacturer : SHENZHEN DOTCOM HOUSEWARE PRODUCTS CO., LTD
Test Performed : Selected test(s) as requested by applicant
Date of Receipt : Oct. 11, 2013
Test Period : Oct. 11, 2013 to Oct. 15, 2013

Test result(s) : Please refer to the following page(s)

*****To be continued*****

Signed for and on behalf of
SGS-CSTC Ltd

Zamber

Zamber Li
Authorized Signatory

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request at www.sgs.com. Terms and conditions apply and for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com. This document is issued for the purpose of providing information and is not intended to constitute an offer of insurance or any other financial product. Any holder of this document who is not a client of the Company is advised to seek professional advice. The Company is not responsible for any loss or damage caused by the use of this document. The Company is not responsible for any loss or damage caused by the use of this document. The Company is not responsible for any loss or damage caused by the use of this document.

SZML 058299

SGS is a member of the SGS Group. For more information, please contact your local SGS office. Tel: +86-755-25208800 Fax: +86-755-25208801 Email: sgs@sgs.com.cn

Member of the SGS Group (SGS SA)



TEST REPORT

No. : SZML131004540
Date : Oct. 16, 2013
Page: 2 of 2

Test Information:

Sample description: See photo

Lab environment condition: 23±2°C, 50±5%RH

| No. | Test item | Test method | Test condition | Test result |
|-----|------------------|---|---|--|
| 1 | Water absorption | ASTM C1016-02 (2008) ¹ Procedure A | Specimen 300×90×4.6mm Immersion condition: 23±2°C, 24h | 0.095g/cm ² (See note 1) |

Note: 1. Water absorption, g/cm² = (Final mass - initial mass) / Initial dry volume.

2. All test specimens were cut from the sample.

3. The above test was carried out by a SGS laboratory.

Photo:



*****End of report*****

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request at www.sgs.com. Terms and conditions apply and for electronic format documents subject to Terms and Conditions for Electronic Documents at www.sgs.com. This document is issued for the purpose of providing information and is not intended to constitute an offer of insurance or any other financial product. Any holder of this document who is not a client of the Company is advised to seek professional advice. The Company is not responsible for any loss or damage caused by the use of this document. The Company is not responsible for any loss or damage caused by the use of this document. The Company is not responsible for any loss or damage caused by the use of this document.

SZML 058300

SGS is a member of the SGS Group. For more information, please contact your local SGS office. Tel: +86-755-25208800 Fax: +86-755-25208801 Email: sgs@sgs.com.cn

Member of the SGS Group (SGS SA)

Color Fastness & Flammability Test

Intertek

Test Report

Tests Conducted (As Requested By The Applicant)

Number: GZHT00870233

1 Color Fastness To Washing (AATCC 61-2010, Test No. 2A, 45 Minutes Mechanical Wash At 120°F In 0.15% AATCC WOB Detergent Solution With 50 Steel Balls):

| | |
|----------------|-----|
| Color Change | 4 |
| Color Staining | |
| -Acetate | 4.5 |
| -Cotton | 4 |
| -Nylon | 4.5 |
| -Polyester | 4.5 |
| -Acrylic | 4.5 |
| -Wool | 4.5 |

2 Color Fastness To Crocking (AATCC 8-2007):

| | |
|-----|-----|
| Dry | 4.5 |
| Wet | 4.5 |

3 Color Fastness To Light (AATCC 16-2004, Option 3, Xenon-Arc Lamp):

| | |
|-------------------------|---|
| 20 Hours Exposure Grade | 4 |
|-------------------------|---|

SP / hpwjxu

Intertek Testing Services (Guangzhou) Ltd.
3/F, Hengyun Building, 235 Kaifa Ave., Guangzhou
Economic & Technological Development District, Guangzhou, China
广州 (广州) 技术服务有限公司
中国广州经济技术开发区开发大道 235 号凯发大厦 3 楼
Tel: (8620)8396 6868 Fax: (8620)8222 8169 PostCode:510730

Page 3 Of 4

Intertek

Test Report

Tests Conducted (As Requested By The Applicant)

Number: GZHT00870233

4 Flammability Test For Carpets And Rugs (US CPSC 16 CFR Part 1631):

The Apparatus And Methods Of Testing Were Those Described In 16 CFR Part 1631 Standard For The Surface Flammability Of Small Carpets And Rugs (FF2-70).

Requirement

- (1) Test Criterion:
The Charred Portion Does Not Extend To Within One Inch Of The Edge Of The Hole In The Flattening Frame At Any Point.
- (2) Acceptance Criterion:
At Least 7 Of The 8 Specimens Must Meet The Test Criterion For The Material To Be Classified As Resistance To Flammability.

Test Result :

The Nearest Distance From Burnt Area To The Frame Edge

| | |
|---------------|-----|
| Original (in) | |
| 3.7 | 3.5 |
| 3.6 | 3.7 |
| 3.6 | 3.8 |
| 3.8 | 3.7 |

Interpretation Of Test Result :

Number Of Specimens Meet The Test Criterion 8

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct.

SP / hpwjxu

Intertek Testing Services (Guangzhou) Ltd.
3/F, Hengyun Building, 235 Kaifa Ave., Guangzhou
Economic & Technological Development District, Guangzhou, China
广州 (广州) 技术服务有限公司
中国广州经济技术开发区开发大道 235 号凯发大厦 3 楼
Tel: (8620)8396 6868 Fax: (8620)8222 8169 PostCode:510730

Page 4 Of 4

Buyers' Guide

1. Color Difference

Due to process of printing onto a fiber surface and the limitation of print machine, the PMS colors and design can only be matched as close as possible.



2. Tolerance

Size tolerance is +/-3%.
Quantity tolerance is +/-5%.
Weight tolerance is +/-5%.



3. Service

Online service, solving your problem in 24 hours



Buyers Guidelines

4. Cleaning Recommendation

Shake mat outside for loose soil;
Vacuum cleaner at slow speed with brush will be good to take the deep dry soil.



Особенности:

- 1) привлечь внимание людей, великий идеал для рекламы.
- 2) Сублимационная печать, ограничение ваше изображение.
- 3) Легко чистить, можно стирать в машине.
- 4) область высокого трафика, в помещении и на открытом воздухе.

5) 7 дней время производства.

6) Отсутствие требования к MOQ, вы можете заказать только 1 шт.

Идеальное использование:

1) Розничный магазин

2) пункт-покупки Display

3) Выставка

4) Продвижение продукта

5) Автомобильные Дилерский

Стандартный размер:

40x60cm, 60x90cm, 83x120cm, 103x150cm, и т.д ...