

## Polypropylen-Teppichfliesen für die Loop-Lösung auf der Muti-Ebene für den gewerblichen Gebrauch








场景实拍图 HX301-07



场景实拍图 HX301-08

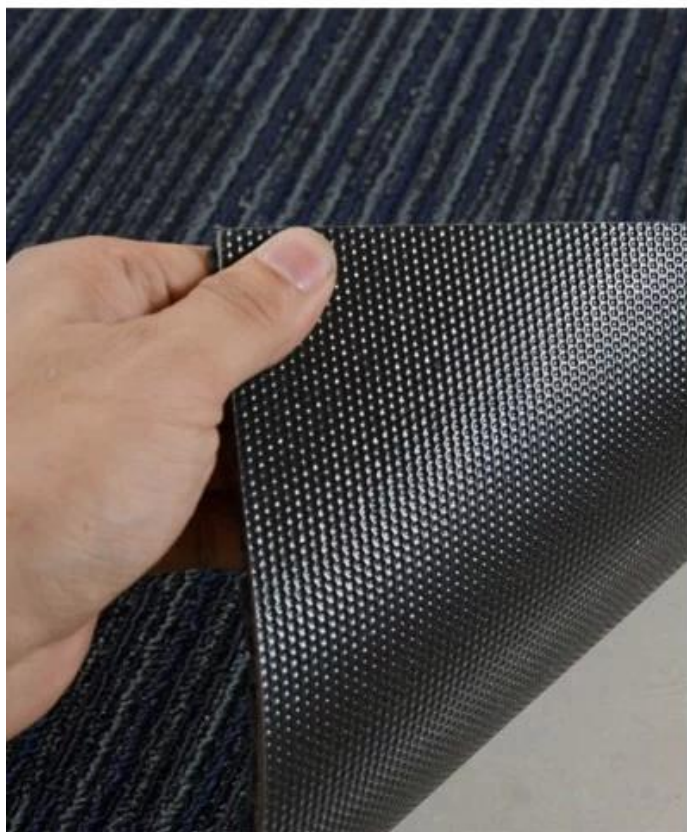

## PVC底部 防水 固绒 耐折

PVC BOTTOM WATERPROOF SOLID PROOF



## DK-HX301



01



02



04



05



07




08



## DK-HX102



01



02



03



04



05



06



07



08



09



10



11



12



## DK-HX201



01



02



03



04



05



06



07



08



09



# DK-HXTJ



01



02



03




04



05




06



07



08

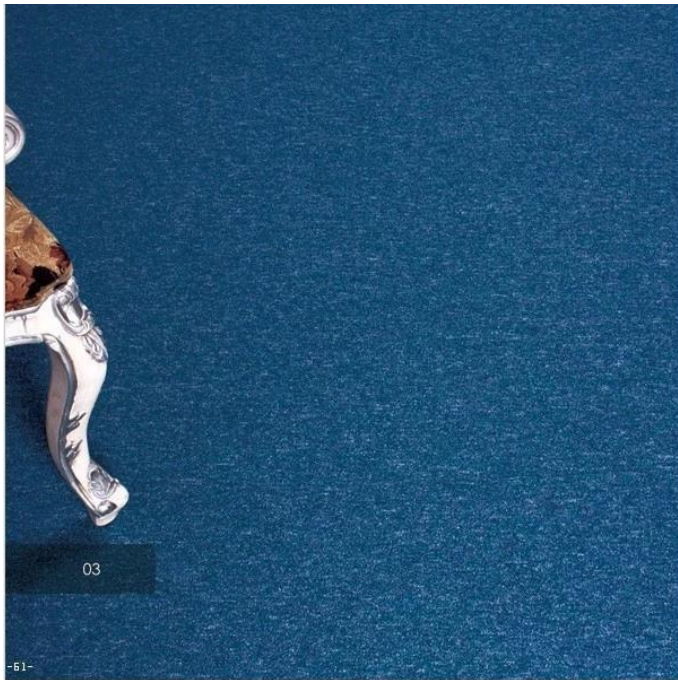

03

-51-

## CP030

Construction: Multi-level Loop  
 Yarn: 100% BCF Polypropylene  
 Coloration: Solution dyed  
 Gauge: 5/64"  
 Pile Weight: 580g/sq.m(20.5oz/sq.yd)±5%  
 Pile Height: 4±0.5 mm  
 Total Thickness: 5.5±0.5 mm  
 Backing: SI-PVC  
 Size: 500 x 500 mm  
 Package: 24pcs/box(6m<sup>2</sup>)

Approved Installation Methods:

↑	→	↑	↑
→	↑	↑	↑

1/4 turn      monolithic

### Colors



▲ 02



▲ 03



▲ 05



▲ 11



▲ 18



▲ 56




▲ 93



## CP031

Construction: Multi-level Loop  
 Yarn: 100% BCF Polypropylene  
 Coloration: Solution dyed  
 Gauge: 1/10"  
 Pile Weight: 560g/sq.m [19.8oz/sq.yd]±5%  
 Pile Height: 4±0.5 mm,  
 Total Thickness: 5.5±0.5 mm  
 Backing: SI-PVC  
 Size: 500 x 500 mm  
 Package: 24pcs/box(6m<sup>2</sup>)

Approved Installation Methods:



### • Colors



## CP032


Construction: Multi-level Loop  
 Yarn: 100% BCF Polypropylene  
 Coloration: Solution dyed  
 Gauge: 1/10"  
 Pile Weight: 560g/sq.m [19.8oz/sq.yd]±5%  
 Pile Height: 4±0.5 mm,  
 Total Thickness: 5.5±0.5 mm  
 Backing: SI-PVC  
 Size: 500 x 500 mm  
 Package: 24pcs/box(6m<sup>2</sup>)

Approved Installation Methods:




### • Colors



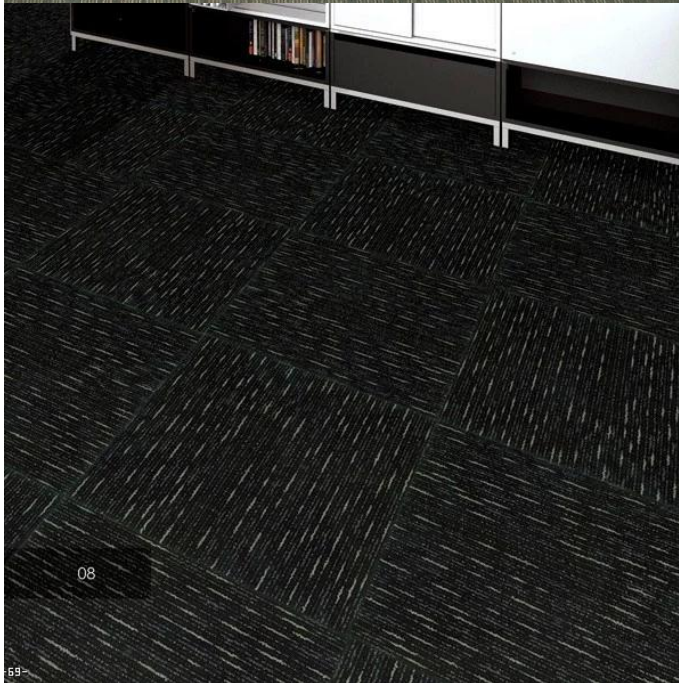

## CP033

Construction: Multi-level - Loop, Tufted  
 Yarn: 100% BCF Polypropylene  
 Coloration: Solution dyed  
 Gauge: 1/12"  
 Pile Weight: 670g/sq.m(23.6oz/sq.ft)±5%  
 Pile Height: 5±0.5 mm  
 Total Thickness: 7.5±0.5 mm  
 Backing: Double PVC with glass fibre  
 Size: 500 x 500 mm  
 Package: 20pcs/box(5m<sup>2</sup>)



### Colors



## CP035

Construction: Multi-level Loop  
 Yarn: 100% BCF Polypropylene  
 Coloration: Solution dyed  
 Gauge: 1/12"  
 Pile Weight: 600g/sq.m(21.2oz/sq.yd)±5%  
 Pile Height: 5±0.5 mm,  
 Total Thickness: 7.5±0.5 mm  
 Backing: Si-PVC  
 Size: 500 x 500 mm  
 Package: 24pcs/box(6m<sup>2</sup>)



### Colors



Verpackungsmethode:





Test: AATCC 134 Elektrostatische Neigung von Teppichen & AATCC 165 Farbechtheit gegen Scheuern

抗静电检验报告AATCC 134

**Independent Textile  
Testing, Inc.**  
Service, Inc.  
PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test No: 124277

**Customer:**

**Subject:** Sample(s) of carpet submitted for testing by the customer and identified below:

**Sample Identification:** Green Tiles

Test Method Conducted  
AATCC 134-1996  
Electrostatic Propensity of Carpets

**Purpose and Scope**

This test method is designed to assess the static generating propensity of carpets developed when a person walks across them by controlled laboratory simulation of conditions which may be met in practice, and more particularly, with respect to those conditions which are known from experience to be strongly contributory to excessive accumulation of static charges.

**Test Conditions:**  
Chamber Temperature: 70° F.  
Chamber Relative Humidity: 20%

Test Results:	Sole	Underlay	Maximum Voltage 1 (kV)	Maximum Voltage 2 (kV)	Average (kV)
Test I Step Test	Neolite	Plate	Neg. 0.3	Neg. 0.5	Neg. 0.4
Test II Scuff Test	Neolite	Plate	Neg. 0.2	Neg. 0.3	Neg. 0.3
Test III Step Test	Leather	Plate	Neg. 0.1	--	--
Test IV Scuff Test	Leather	Plate	Pos. 0.2	--	--

**Soles:**

- a) Neolite XS 664
- b) Suede Leather

**Underlayment:**

- a) Plate: Earth grounded metal plate
- b) HIJ: Standard 40 oz./yd<sup>2</sup> rubberized Hair/Jute cushion

  
President L. Verr Suddeth

Our files and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our files and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and labels of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

色牢度检验报告AATCC 165

**Independent Textile  
Testing, Inc.**  
Service, Inc.  
PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
Phone: 706-278-3013 - Fax: 706-272-7657 - E-mail: info@intlab.com

Test No: 124277

**Customer:**

**Subject:** Sample(s) of carpet submitted for testing by the customer and identified below:

**Sample Identification:** Green Tiles

Test Method Conducted  
AATCC Test Method 165  
Colorfastness to Crocking: Carpets

**Purpose and Scope**

This test method is designed to determine the degree of color transfer from the surface of carpets to other surfaces by rubbing. The intent is to reproduce as nearly as possible real-to-life situations in all constructions whether dyed, printed or otherwise colored.

**Procedure**

Test procedures employing white test cloths, both dry and wet with water are given.

Test Specimen Identification	Wet Crocking Rating	Dry Crocking Rating
See Above	5	5

Key to Ratings	
5	Negligible or no stain
4	Slight stain
3	Noticeable stain
2	Considerable stain
1	Severe stain

  
President L. Verr Suddeth

Our files and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., shall require our prior written approval. Our files and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and labels of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Test: AATCC 16E Farbechtheit gegen Licht & AATCC 175 Fleckenbeständigkeit

耐光色牢度检验报告AATCC 16E

抗污性能检验报告AATCC 175

Test No: 124277

**Independent Textile Testing Service, Inc.**

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
Phone: 706-278-3613 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted  
AATCC Test Method 16 Option E  
Colorfastness to Light (Water-Cooled Xenon Arc)

Purpose and Scope

This test method provides the general principles and procedures which are currently in use for determining the colorfastness, to light of textile materials.

Procedure

Samples of the textile material to be tested and the agreed upon comparison standard(s) are exposed simultaneously to a light source under specified conditions. The colorfastness to light of the specimen is evaluated by comparison of the color change of the exposed portion to the masked or control portion of the test specimen using the AATCC Gray Scale for Color Change or by instrumental color measurement.

Test Specimen Identification	Number of Cycles	Rating
See Above	2 (40 AFT/h)	5

Key to Ratings

5 Negligible or no change

4 Slight change

3 Noticeable change

2 Considerable change

1 Severe change

  
 President L. Earl Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others is the act of the reader of Independent Textile Testing Service, Inc. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

Test No: 124277

**Independent Textile Testing Service, Inc.**

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
Phone: 706-278-3613 • Fax: 706-272-7057 • E-mail: info@inttlab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted  
AATCC Test Method 175-2003  
Stain Resistance: Pile Floor Coverings

Purpose and Scope

This test method is intended for use on pile floor coverings to determine the resistance to staining by acid food colors.


Procedure

A specimen of pile floor covering is stained with a small volume of a diluted aqueous solution of Food Drug & Cosmetic (FD&C) Red 40 adjusted to an acid pH. After allowing the stained specimen to remain at controlled conditions for 24 ± 4 hours, it is rinsed in water to remove all unused FD&C Red 40 dye. Any residual stain is assessed after drying.

Test Sample Rating 9

Table 1. Rating Scale

Grade Number	Definition
10	No residual stain
1	Severe residual stain

  
 President L. Earl Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others is the act of the reader of Independent Textile Testing Service, Inc. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of any other product. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

ASTM E648 Bodenbelagsstrahlplatten-Test & ASTM D 2859 Flammbarkeitstest

阻燃检验报告ASTM E648

**Independent Textile Testing**  
 Service, Inc.  
 PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722  
 Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@intalab.com

Test Number: 124277

Test Report

**Customer:**  
**Subject:** Specimens of the submitted sample were prepared and tested in accordance with ASTM E 648-05 and/or Federal Test Method 372, NFPA 253

**FLOORING RADIANT PANEL TEST**

**Sample Description**

Green Tiles

**Test Assembly**

Mounted on 6mm FRC Board  
 (Using Premium Multi-Purpose Adhesive)

Test Results	Specimen No. 1	Specimen No. 2	Specimen No. 3
Critical Radiant Flux	0.51 watts/cm <sup>2</sup>	0.65 watts/cm <sup>2</sup>	0.67 watts/cm <sup>2</sup>
Total Burn Length	39.0 cm	32.0 cm	31.0 cm
Flame Front Out	56.0 minutes	26.0 minutes	45.0 minutes

Average Critical Radiant Flux	0.61 watts/cm <sup>2</sup>
Estimated Standard Deviation	0.09 watts/cm <sup>2</sup>
	14.3% coefficient of variation

  
 President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other person or the use of the name of Independent Textile Testing Service, Inc., must be made at your written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

阻燃检验报告ASTM D 2859

**Independent Textile Testing**  
 Service, Inc.  
 PO Box 1948 • 1503 East Morris Street • Dalton, GA 30722  
 Phone: 706-278-3013 • Fax: 706-272-7957 • E-mail: info@intalab.com

Test Number: 124277


Test Report

**Customer:**  
**Subject:** "Consumer Product Safety Commission (CPSC) FF 1-70"  
 "16 CFR 1630"  
 "ASTM D 2859-04"  
 "Consumer Product Safety Improvement Act"

**Scope:** This test method covers the determination of the flammability of finished textile floor covering materials when exposed to an ignition source under controlled laboratory conditions. It is applicable to all types of textile floor coverings regardless of the method of fabrication or whether they are made from natural or man-made fibers.

**FLAMMABILITY TEST REPORT**

STYLE	COLOR	ROLL	TESTED	PASSED
Green Tiles	-	-	8	8



  
 President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any other person or the use of the name of Independent Textile Testing Service, Inc., must be made at your written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of equipment, material or other products. The reports and letters of this office of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

ASTM E662 (1) Rauchdichtetest

烟密度检验报告ASTM E662 (1)

**Independent Textile Testing Service, Inc.**  
 Test Number: 124277  
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@ittstlab.com

**Customer:**

**Subject:** Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 256, ASTM E 662-06.

**SMOKE DENSITY TEST (NIST)**

**Operating Conditions**


Irradiance: 2.5 watts/cm<sup>2</sup>      G Factor      132  
 Thermal Exposure: Flaming  
 Furnace Voltage: 100  
 Burner Fuel: Propane

**Sample Description**

Green Tiles

**Test Results**

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H <sub>2</sub> O			
Minimum Transmittance (TM), % at, minutes	88%	84%	92%	
	9.40	9.73	10.13	9.75
Maximum Specific Optical Density (DM) Clear Beam, (DC)	139	142	137	139
	14	20	16	17
<b>DM, CORRECTED (DMC)</b>	125	122	121	123
Specific Optical Density at 1.5 minutes	16	26	23	22
Specific Optical Density at 4.0 minutes	89	105	87	94
Time to 90% DM, minutes	6.90	6.55	7.17	6.87
Time to DS = 16, minutes	1.55	1.35	1.30	1.40

  
 President L. Kent Sudoth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

测试文件  
69

烟密度检验报告ASTM E662 (2)

**Independent Textile Testing Service, Inc.**  
 Test Number: 124277  
 PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722  
 Phone: 706-278-3013 • Fax: 706-272-7897 • E-mail: info@ittstlab.com

**Customer:**

**Subject:** Specimens of the submitted sample were prepared and tested in accordance with the procedures proposed by the National Institute of Standards and Technology (formerly National Bureau of Standards), Technical Note 708 and NFPA 256, ASTM E 662-06.

**SMOKE DENSITY TEST (NIST)**

**Operating Conditions**

Irradiance: 2.5 watts/cm<sup>2</sup>      G Factor      132  
 Thermal Exposure: Non-flaming  
 Furnace Voltage: 100  
 Burner Fuel: --

**Sample Description**

Green Tiles

**Test Results**

	#1	#2	#3	Average
Chamber Temperature, °F (start)	95	95	95	
Chamber Pressure	Maintained positive, under 3" H <sub>2</sub> O			
Minimum Transmittance (TM), % at, minutes	18%	52%	30%	
	12.30	13.03	12.13	12.49
Maximum Specific Optical Density (DM) Clear Beam, (DC)	494	433	465	464
	2	2	2	2
<b>DM, CORRECTED (DMC)</b>	492	431	463	462
Specific Optical Density at 1.5 minutes	1	1	1	1
Specific Optical Density at 4.0 minutes	43	38	46	42
Time to 90% DM, minutes	8.77	9.30	9.08	9.05
Time to DS = 16, minutes	3.28	3.40	3.27	3.32

  
 President L. Kent Sudoth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc. may require our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the quality of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc. are not to be used under any circumstances in advertising to the general public.

测试文件  
70

Test: ASTM D 1335 Büschelbindung aus Pile-Bodenbelägen & AACHEN ITTS 004  
 Dimensionsstabilität

内在与外在质量检验报告ASTM D 1335

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722  
 Phone: 706-275-3613 • Fax: 706-273-7657 • E-mail: info@itslab.com

Test Report

Customer:

Subject: Sample(s) submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted  
 ASTM D 1335 Tuft Bind of Pile Floor Coverings

Scope:

This test method covers the determination of the force required to pull a tuft completely out of a cut pile floor covering or to pull one or both legs of a loop free from the backing of looped pile floor coverings.

Test Results

1) 8.5	6) 7.2	11) 9.5
2) 10.8	7) 10.8	12) 9.5
3) 7.9	8) 5.9	13) 8.9
4) 8.2	9) 9.4	14) 6.2
5) 10.4	10) 10.5	15) 11.0

Average Tuft Bind: 9.0 lbs.

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, or their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of assembly, chemical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

尺寸稳定性检验报告AACHEN ITTS 004

Test No: 124277



PO Box 1948 - 1563 East Morris Street - Dalton, GA 30722  
 Phone: 706-275-3613 • Fax: 706-273-7657 • E-mail: info@itslab.com

Test Report

Customer:

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Green Tiles

Test Method Conducted  
 ITTS 004  
 AACHEN Dimensional Stability

Purpose and Scope

This test procedure measures the dimensional stability of textile floor coverings both modular and broadloom when subjected to varied moisture, heat and dry conditions.

Test Condition	Measurement	Percent Change
M <sub>0</sub>	19.6750	
MT <sub>1</sub>	19.6688	-0.032
MT <sub>2</sub>	19.6763	+0.006
MT <sub>3</sub>	19.6638	-0.057
MT <sub>4</sub>	19.6668	-0.032
		-0.0062"

Test Condition Key

M<sub>0</sub> Machine Direction Original Measurement  
 C<sub>0</sub> Cross Direction Original Measurement  
 T<sub>1</sub> Two (2) hours in an oven at 60° C  
 T<sub>2</sub> Two (2) hours in a 1% solution at 20° C  
 T<sub>3</sub> Twenty-four (24) hours in an oven at 60° C  
 T<sub>4</sub> Forty-eight (48) hours in standard climate at 21° C & 65% RH

Test Condition	Measurement	Percent Change
C <sub>0</sub>	19.6925	
CT <sub>1</sub>	19.6888	-0.019
CT <sub>2</sub>	19.6925	0.000
CT <sub>3</sub>	19.6850	-0.038
CT <sub>4</sub>	19.6913	-0.006
		-0.0012"

President L. Kent Suddeth

Our offices and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., their services, or their other operations. Our offices and reports apply only to the samples tested and are not disseminated outside of the boundaries of assembly, chemical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

**Call**  
 (86) 755 82132292

Or

**Enquiry Now**  
 for more style